



Europäisches Patentamt
European Patent Office
Offic européen des brevets



Publication number: **0 356 672 B1**

EUROPEAN PATENT SPECIFICATION

- (49) Date of publication of patent specification: 07.04.93 (51) Int. Cl.⁵: **C09K 19/42, C09K 19/02, G02F 1/13**
(21) Application number: **89112758.1**
(22) Date of filing: **12.07.89**

(54) **Ferroelectric chiral smectic liquid crystal composition and liquid crystal device using same.**

- (30) Priority: 13.07.88 JP 175783/88
03.02.89 JP 25049/89
09.06.89 JP 147981/89
(43) Date of publication of application: 07.03.90 Bulletin 90/10
(49) Publication of the grant of the patent: 07.04.93 Bulletin 93/14
(54) Designated Contracting States: AT BE CH DE ES FR GB GR IT LI LU NL SE
(56) References cited: EP-A- 0 178 647
EP-A- 0 199 004
(73) Proprietor: **CANON KABUSHIKI KAISHA**
30-2, 3-chome, Shlmomaruko, Ohta-ku
Tokyo(JP)
(72) Inventor: **Terada, Masahiro**
381-1-9-1 Hase
Atsugi-shi Kanagawa-ken(JP)
Inventor: **Togano, Takeshi**
1-28-12 Gontazaka
Hodogaya-ku Yokohama-shi
Kanagawa-ken(JP)

- Inventor: **Yamashita, Masataka**
1-20-24-102 Nakahara
Hiratsuka-shi Kanagawa-ken(JP)
Inventor: **Takiguchi, Takao**
1-10-2 Kyuden
Setagaya-ku Tokyo(JP)
Inventor: **Asaoka, Masanobu**
4-1-4 Sasage Kohnan-ku
Yokohama-shi Kanagawa-ken(JP)
Inventor: **Shinjo, Kenji**
Canon-ryo, 2-10-1 Asahicho
Atsugi-shi Kanagawa-ken(JP)
Inventor: **Kitayama, Hiroyuki**
1-8-19-201 Kamitsuruma
Sagamihara-shi Kanagawa-ken(JP)
Inventor: **Nakamura, Shinichi**
Canon-ryo, 2-10-1 Asahicho
Atsugi-shi Kanagawa-ken(JP)
(74) Representative: **Bühling, Gerhard, Dipl.-Chem.**
et al
Patentanwaltsbüro Tiedtke-Bühling-Kinne
Grupe-Pellmann-Grams-Strulff-Winter-Roth
Bavariaring 4
W-8000 München 2 (DE)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent grant. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 356 672 B1

Description

FIELD OF THE INVENTION AND RELATED ART

5 The present invention relates to a liquid crystal composition used in a liquid crystal display device, a liquid crystal-optical shutter, etc., more particularly to a novel liquid crystal composition with improved responsiveness to an electric field and a liquid crystal device using the liquid crystal composition.

Hitherto, liquid crystal devices have been used as an electro-optical device in various fields. Most liquid crystal devices which have been put into practice use TN (twisted nematic) type liquid crystals, as shown in
 10 "Voltage-Dependent Optical Activity of a Twisted Nematic Liquid Crystal" by M. Schadt and W. Helfrich "Applied Physics Letters" Vol. 18, No. 4 (Feb. 15, 1971) pp. 127-128.

These devices are based on the dielectric alignment effect of a liquid crystal and utilize an effect that the average molecular axis direction is directed to a specific direction in response to an applied electric field because of the dielectric anisotropy of liquid crystal molecules. It is said that the limit of response
 15 speed is on the order of milli-seconds, which is too slow for many uses. On the other hand, a simple matrix system of driving is most promising for application to a large-area flat display in view of cost, productivity, etc., in combination. In the simple matrix system, an electrode arrangement wherein scanning electrodes and signal electrodes are arranged in a matrix, and for driving, a multiplex driving scheme is adopted wherein an address signal is sequentially, periodically and selectively applied to the scanning electrodes
 20 and prescribed data signals are selectively applied in parallel to the signal electrodes in synchronism with the address signal.

When the above-mentioned TN-type liquid crystal is used in a device of such a driving system, a certain electric field is applied to regions where a scanning electrode is selected and signal electrodes are not selected or regions where a scanning electrode is not selected and a signal electrode is selected (which
 25 regions are so called "half-selected points"). If the difference between a voltage applied to the selected points and a voltage applied to the half-selected points is sufficiently large, and a voltage threshold level required for allowing liquid crystal molecules to be aligned or oriented perpendicular to an electric field is set to a value therebetween, display devices normally operate. However, in fact, as the number (N) of scanning lines increases, a time (duty ratio) during which an effective electric field is applied to one
 30 selected point when a whole image area (corresponding to one frame) is scanned decreases with a ratio of 1/N. Accordingly, the larger the number of scanning lines are, the smaller is the voltage difference of an effective value applied to a selected point and non-selected points when scanning is repeatedly effected. As a result, this leads to unavoidable drawbacks of lowering of image contrast or occurrence of interference or crosstalk. These phenomena are regarded as essentially unavoidable problems appearing when a liquid
 35 crystal having no bistability (i.e. liquid crystal molecules are horizontally oriented with respect to the electrode surface as stable state and is vertically oriented with respect to the electrode surface only when an electric field is effectively applied) is driven (i.e. repeatedly scanned) by making use of a time storage effect. To overcome these drawbacks, the voltage averaging method, the two-frequency driving method, the multiple matrix method, etc. has been already proposed. However, any method is not sufficient to overcome
 40 the above-mentioned drawbacks. As a result, it is the present state that the development of large image area or high packaging density in respect to display elements is delayed because it is difficult to sufficiently increase the number of scanning lines.

To overcome drawbacks with such prior art liquid crystal devices, the use of liquid crystal devices having bistability has been proposed by Clark and Lagerwall (e.g. Japanese Laid-Open Patent Appln. No.
 45 56-107216, U.S.P. No. 4367924, etc.). In this instance, as the liquid crystals having bistability, ferroelectric liquid crystals having chiral smectic C-phase (SmC*) or H-phase (SmH*) are generally used. These liquid crystals have bistable states of first and second stable states with respect to an electric field applied thereto. Accordingly, as different from optical modulation devices in which the above-mentioned TN-type liquid crystals are used, the bistable liquid crystal molecules are oriented to first and second optically stable
 50 states with respect to one and the other electric field vectors, respectively. Further, this type of liquid crystal has a property (bistability) of assuming either one of the two stable states in response to an applied electric field and retaining the resultant state in the absence of an electric field.

In addition to the above-described characteristic of showing bistability, such a ferroelectric liquid crystal (hereinafter sometimes abbreviated as "FLC") has an excellent property, i.e., a high-speed responsiveness.
 55 This is because the spontaneous polarization of the ferroelectric liquid crystal and an applied electric field directly interact with each other to induce transition of orientation states. The resultant response speed is faster than the response speed due to the interaction between dielectric anisotropy and an electric field by 3 to 4 digits.

Thus, a ferroelectric liquid crystal potentially has very excellent characteristics, and by making use of these properties, it is possible to provide essential improvements to many of the above-mentioned problems with the conventional TN-type devices. Particularly, the application to a high-speed optical shutter and a display of a high density and a large picture is expected.

5 A simple matrix display apparatus including a device comprising such a ferroelectric liquid crystal layer between a pair of substrates may be driven according to a driving method as disclosed in, e.g., Japanese Laid-Open Patent Applications Nos. 193426/1984, 193427/1984, 156046/1985 and 156047/1985.

Figures 4A and 4B are waveform diagrams showing driving voltage waveforms adopted in driving a ferroelectric liquid crystal panel as an embodiment of the liquid crystal device according to the present invention. Figure 5 is a plan view of such a ferroelectric liquid crystal panel 51 having a matrix electrode structure. Referring to Figure 5, the panel 51 comprises scanning lines 52 and data lines 53 intersecting with the scanning lines. Each intersection comprises a ferroelectric liquid crystal disposed between a scanning line 52 and a data line 53 to form a pixel.

Referring to Figure 4A, at S_S is shown a selection scanning signal waveform applied to a selected scanning line, at S_N is shown a non-selection scanning signal waveform applied to a non-selected scanning line, at I_S is shown a selection data signal waveform (providing a black display state) applied to a selected data line, and at I_N is shown a non-selection data signal waveform applied to a non-selected data line. Further, at $I_S - S_S$ and $I_N - S_S$ in the figure are shown voltage waveforms applied to pixels on a selected scanning line, whereby a pixel supplied with the voltage $I_S - S_S$ assumes a black display state and a pixel supplied with the voltage $I_N - S_S$ assumes a white display state. Figure 4B shows a time-serial waveform used for providing a display state as shown in Figure 6.

In the driving embodiment shown in Figures 4A and 4B, a minimum duration Δt of a single polarity voltage applied to a pixel on a selected scanning line corresponds to the period of a writing phase t_2 , and the period of a one-line clearing phase t_1 is set to $2\Delta t$.

25 The parameters V_S , V_1 and Δt in the driving waveforms shown in Figures 4A and 4B are determined depending on switching characteristics of a ferroelectric liquid crystal material used.

Figure 7 shows a $V - T$ characteristic, i.e., a change in transmittance T when a driving voltage denoted by $(V_S + V_1)$ is changed while a bias ratio as mentioned hereinbelow is kept constant. In this embodiment, the parameters are fixed at constant values of $\Delta t = 50 \mu s$ and a bias ratio $V_1/(V_1 + V_S) = 1/3$. On the right side of Figure 7 is shown a result when the voltage $(I_N - S_S)$ shown in Figure 4 is applied to a pixel concerned, and on the left side of Figure 7 is shown a result when the voltage $(I_S - S_S)$ is applied to a pixel concerned, respectively while increasing the voltage $(V_S + V_1)$. On both sides of the ordinate, the absolute value of the voltage $(V_S + V_1)$ is separately indicated. Herein, a voltage V_1 denotes the absolute value of $(V_S + V_1)$ required for switching from a white state to a black state by applying a voltage signal V_B^2 shown in Figure 4A, a voltage V_2 denotes the absolute value of $(V_S + V_1)$ required for switching (resetting) a black state to a white state by applying a voltage V_R at $I_N - S_S$, and a voltage V_3 is the value of $(V_S + V_1)$ beyond which a pixel concerned written in white is unexpectedly inverted into a black state. In this instance, a relationship of $V_2 < V_1 < V_3$ holds. The voltage V_1 may be referred to as a threshold voltage in actual drive and the voltage V_3 may be referred to as a crosstalk voltage. Such a crosstalk voltage V_3 is generally present in actual matrix drive of a ferroelectric liquid crystal device. In an actual drive, $\Delta V = (V_3 - V_1)$ provides a range of $|V_S + V_1|$ allowing a matrix drive and may be referred to as a (driving) voltage margin, which is preferably large enough. It is of course possible to increase the value of V_3 and thus $\Delta V (= V_3 - V_1)$ by increasing the bias ratio (i.e., by causing the bias ratio to approach a unity). However, a large bias ratio corresponds to a large amplitude of a data signal and leads to an increase in flickering and a lower contrast, thus being undesirable in respect of image quality. According to our study, a bias ratio of about 1/3 - 1/4 was practical. On the other hand, when the bias ratio is fixed, the voltage margin ΔV strongly depends on the switching characteristics of a liquid crystal material used, and it is needless to say that a liquid crystal material providing a large ΔV is very advantageous for matrix drive.

The upper and lower limits of application voltages and a difference therebetween (driving voltage margin ΔV) by which selected pixels are written in two states of "black" and "white" and non-selected pixels can retain the written "black" and "white" states at a constant temperature as described above, vary depending on and are inherent to a particular liquid crystal material used. Further, the driving margin is deviated according to a change in environmental temperature, so that optimum driving voltages should be set in an actual display apparatus according to a liquid crystal material used and an environmental temperature.

In a practical use, however, when the display area of a matrix display apparatus is enlarged, the differences in environmental conditions (such as temperature and cell gap between opposite electrodes) naturally increase, so that it becomes impossible to obtain a good quality of image over the entire display

area by using a liquid crystal material having a small driving voltage margin.

On the other hand, it is known that the ferroelectric liquid crystal molecules under such non-helical conditions are disposed in succession so that their directors (longer molecular axes) are gradually twisted between the substrates and do not show a uniaxial orientation or alignment (i.e., in a splay alignment state).

5 A problem in this case is a low transmittance through the liquid crystal layer.

Transmitted light intensity I through a liquid crystal is given by the following equation with respect to the incident light intensity I_0 under cross nicols when the uniaxial alignment of the molecules is assumed:

$$I = I_0 \sin^2(4\theta a) \cdot \sin^2(\pi \Delta n d / \lambda) \quad (1),$$

10

wherein Δn denotes the refractive index anisotropy of the FLC; d , the cell thickness; λ , the wavelength of the incident light; and θa , a half of the angle between two stable states (tilt angle).

When a conventional FLC cell is used, it has been experimentally known that θa is 5 - 8 degrees under a twisted alignment condition. The control of physical properties affecting the term $\Delta n d / \lambda$ cannot be easily performed, so that it is desired to increase θa to increase I . However, this has not been successfully accomplished by only a static alignment technique.

15 With respect to such a problem, it has been proposed to utilize a torque relating to a dielectric anisotropy $\Delta\epsilon$ of an FLC (1983 SID report from AT & T; Japanese Laid-Open Patent Applns. 245142/1986, 246722/1986, 246723/1986, 246724/1986, 249024/1986 and 249025/1986). More specifically, a liquid crystal molecule having a negative $\Delta\epsilon$ tends to become parallel to the substrates under application of an electric field. By utilizing this property, if an effective value of AC electric field is applied even in a period other than switching, the above-mentioned twisted alignment is removed, so that θa is increased to provide an increased transmittance (AC stabilization effect). A torque ΓP_s acting on FLC molecules involved in switching of states and a torque $\Gamma \Delta\epsilon$ acting on FLC molecules relating to the AC stabilization effect are respectively proportional to physical properties as shown in the following formulas:

$$\Gamma P_s \propto P_s \cdot E \quad (2)$$

$$\Gamma \Delta\epsilon \propto 1/2 \Delta\epsilon \cdot \epsilon_0 \cdot E^2 \quad (3)$$

30 The above formula (3) apparently shows that the sign and absolute value of $\Delta\epsilon$ of the FLC play an important role.

Figure 8 attached hereto shows the change of θa versus V_{rms} experimentally measured for 4 FLCs having different values of $\Delta\epsilon$. The measurement was conducted under application of AC rectangular pulses of 60 KHz so as to remove the influence of P_s . The curves (I) - (IV) correspond to the results obtained by using FLCs showing the following $\Delta\epsilon$ values

35

$$\begin{array}{ll} \text{(I)} & \Delta\epsilon \approx -5.5, \\ \text{(III)} & \Delta\epsilon \approx -0. \end{array} \quad \begin{array}{ll} \text{(II)} & \Delta\epsilon \approx -3.0, \\ \text{(IV)} & \Delta\epsilon \approx 1.0. \end{array}$$

40 Qualitatively, the order of $\Delta\epsilon$ was (I) < (II) < (III) < (IV).

As is clear from the graph in Figure 8, a larger negative value of $\Delta\epsilon$ provides a large θa at a lower voltage and thus contributes to provision of an increased I .

The transmittances obtained by using the liquid crystals (I) and (III) were 15 % for (I) and 6 % for (III) (under application of rectangular AC waveforms of 60 kHz and ± 8 V), thus showing a clear difference.

45 As is known from the above examples, the display characteristics of an SSFLC (Surface-Stabilized FLC) can be remarkably changed by controlling the properties relating to $\Delta\epsilon$ and P_s .


In order to provide a ferroelectric liquid crystal composition having a negatively large $\Delta\epsilon$, it is most effective to include a compound having a negative $\Delta\epsilon$ with a large absolute value. For example, it is possible to obtain a compound having a negatively large $\Delta\epsilon$ by introducing a halogen or cyano group in a shorter axis direction of a molecule or by introducing a heterocyclic skeleton in a molecule.

50


The magnitude of $\Delta\epsilon$ of a compound having a negative $\Delta\epsilon$ substantially varies depending on the structure thereof. Some examples of such compounds are shown below:

55

$$|\mathcal{E}| \leq 2$$




5




10


$$2 < |\mathcal{E}| \leq 5$$



15



20



25

30




35

40


45

50




55



$$5 < |\Delta\epsilon| \leq 10$$



$$|\Delta\epsilon| > 10$$



Herein, R and R' respectively denote an alkyl group. These may be classified roughly into three groups including compounds having a negatively small $\Delta\epsilon$ ($|\Delta\epsilon| \leq 2$), compounds having a negatively medium $\Delta\epsilon$ ($2 < |\Delta\epsilon| \leq 10$) and compounds having a negatively large $\Delta\epsilon$ ($|\Delta\epsilon| > 10$). Among these, compounds having a $|\Delta\epsilon|$ of ≤ 2 have little effect of increasing $|\Delta\epsilon|$. Compounds having a $|\Delta\epsilon|$ of > 10 are very effective in increasing $|\Delta\epsilon|$ but those available heretofore are only dicyanohydroquinone derivatives.

However, a dicyanohydroquinone derivative, while it has a large $|\Delta\epsilon|$ -increasing effect, has a high viscosity, so that it is liable to degrade a switching characteristic when its content is increased. On the other hand, among the compounds having a medium $|\Delta\epsilon|$ ($2 < |\Delta\epsilon| \leq 10$), some compounds have a moderately low viscosity while their $|\Delta\epsilon|$ -increasing effect is somewhat lower than those having a large $|\Delta\epsilon|$.

From the above consideration, it is essential to select a compound having a negative anisotropy, preferably one having a $|\Delta\epsilon|$ of > 2 , and mixing it with an appropriately selected other compound in a properly selected mixing ratio.

5 SUMMARY OF THE INVENTION


An object of the present invention is to provide a chiral smectic liquid crystal composition having a large driving voltage margin adapted for providing a practical ferroelectric liquid crystal device and a wide driving voltage margin affording satisfactory drive of entire pixels even when some degree of temperature
10 fluctuation is present over a display area comprising the pixels of a liquid crystal device.

Another object of the present invention is to provide a liquid crystal composition further containing a mesomorphic compound having a negative dielectric anisotropy to show an AC stabilization effect providing remarkably improved display characteristics.


A further object of the present invention is to provide a liquid crystal device using such a liquid crystal
15 composition and showing improved driving and display characteristics.

According to the present invention, there is provided a ferroelectric chiral smectic liquid crystal composition, comprising


at least one optically active compound represented by the following formula (I):




25 wherein R_1 and R_2 respectively denote a linear or branched alkyl group having 1 - 18 carbon atoms capable of having a substituent, at least one of R_1 and R_2 being optically active; X_1 denotes -O-,




or



40 and X_2 denotes a single bond, -O-,




or




55

and

at least one compound represented by the following formula (II):



wherein R_3 and R_4 respectively denote a linear or branched optically inactive alkyl group having 1 - 18 carbon atoms capable of having an alkoxy group of 1 - 12 carbon atoms; X_3 and X_4 respectively denote a single bond, -O-,



and m and n are respectively 0, 1 or 2 with proviso that both of m and n are not 0.

According to the present invention, there is further provided a ferroelectric liquid crystal composition as described above further comprising a mesomorphic compound having a negative dielectric anisotropy, which is preferably one having a $\Delta\epsilon < -2$, more preferably $\Delta\epsilon < -5$, most preferably $\Delta\epsilon < -10$.

The present invention further provides a liquid crystal device comprising a pair of substrates and such a ferroelectric liquid crystal composition as described above disposed between the electrode plates.

These and other objects, features and advantages of the present invention will become more apparent upon a consideration of the following description of the preferred embodiments of the present invention taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a schematic sectional view of a liquid crystal display device using a ferroelectric liquid crystal;

Figures 2 and 3 are schematic perspective views of a device cell embodiment for illustrating the operation principle of a ferroelectric liquid crystal device;

Figure 4A shows unit driving waveforms used in an embodiment of the present invention; Figure 4B is time-serial waveforms comprising a succession of such unit waveforms;

Figure 5 is a plan view of a ferroelectric liquid crystal panel having a matrix electrode structure;


Figure 6 is an illustration of a display pattern obtained by an actual drive using the time-serial waveforms shown in Figure 4B;

Figure 7 is a V-T characteristic chart showing a change in transmittance under application of varying drive voltages; and


Figure 8 is a graph showing changes in tilt angle θ_a versus effective voltage V_{rms} with respect to several ferroelectric liquid crystals having different values of dielectric anisotropy $\Delta\epsilon$.

DETAILED DESCRIPTION OF THE INVENTION


Preferred examples of the optically active compounds represented by the above-mentioned general formula (I) may include those represented by the following formulas (I-a) to (I-l).




(I-a)




(I-b)




(I-c)




(I-d)




(I-e)



(I-f)



5



10



15




20



25

30




35

In the above-formulas (I-a) - (I-l), R_1 and R_2 are the same as in the general formula (I). Preferred examples of R_1 and R_2 may include those of the following (I-i) to (I-iii).

(I-i) R_1 is an n-alkyl group, and R_2 is


45



wherein s is 0 - 7 and R_5 is a linear or branched alkyl group.

(I-ii) R_1 is

55



wherein t is 0 - 7 and R_6 is a linear or branched alkyl group, R_2 is an n-alkyl group.

(I-iii) R₁ is








and R₂ is




wherein s and t are respectively 0 - 7, and R₅ and R₆ are respectively a linear or branched alkyl group.

Further, preferred examples of the compounds represented by the above-mentioned general formula
20 (II) may include those represented by the following formulas (II-a) to (II-e).



In the formulas (II-a) to (II-e), R₃, R₄, X₃ and X₄ are respectively the same as in the general formula (II).
Preferred examples of X₃ and X₄ may include the following combinations (II-i) to (II-viii):

- 50 (II-i) X₃ is a single bond and X₄ is a single bond,
(II-ii) X₃ is a single bond and X₄ is -O-,
(II-iii) X₃ is a single bond and X₄ is



(II-iv) X_3 is a single bond and X_4 is

5



(II-v) X_3 is -O- and X_4 is a single bond,

(II-vi) X_3 is -O- and X_4 is -O-,

10

(II-vii) X_3 is -O- and X_4 is

15



(II-viii) X_3 is -O- and X_4 is

20




Further, preferred examples of R_3 and R_4 in the formulas (II-a) to (II-e) may include the following combinations (II-ix) to (II-xi):

25

(II-ix) R_3 is an n-alkyl group and R_4 is an n-alkyl group.

(II-x) R_3 is an n-alkyl group and R_4 is

30




35

wherein p is 0 - 7 and R_7 is a linear or branched alkyl group.

(II-xi) R_3 is an alkyl group and R_4 is

40



wherein q is 0 - 7, r is 0 or 1 and R_8 is a linear or branched alkyl group.

45


Specific examples of the compounds represented by the above-mentioned general formula (I) may include those shown by the following structural formulas.

50

55

(1-1)


5



10

(1-2)


15



20


(1-3)

25



(1-4)


30



35

(1-5)

40




45


50

55


(1-6)




(1-7)




(1-8)




(1-9)




(1-10)




(1-11)




(1-12)




(1-13)

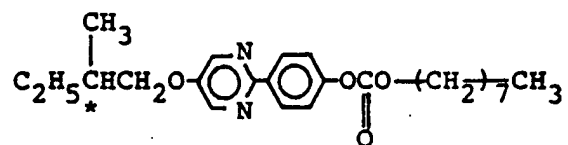


(1-14)




(1-15)




(1-16)




(1-17)




(1-18)




(1-19)

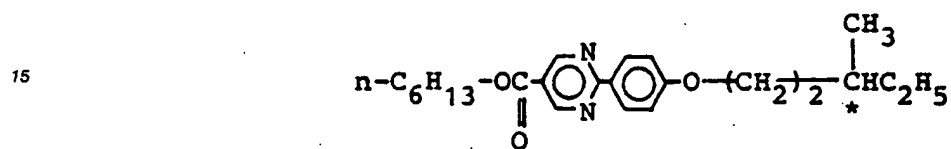


(1-20)




(1-21)

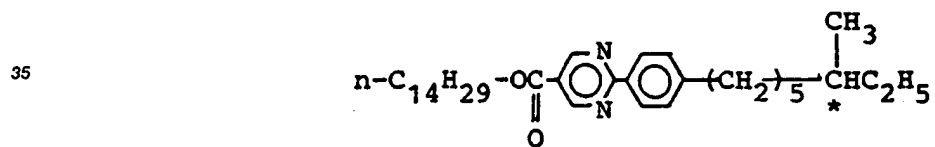


(1-22)




(1-23)




(1-24)




(1-25)




(1-26)

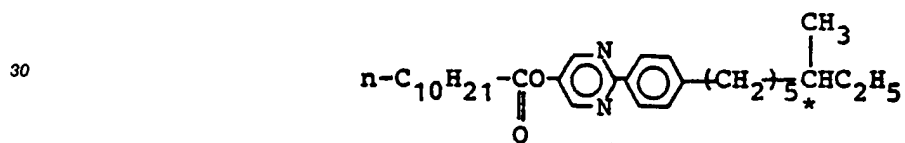


(1-27)




(1-28)




(1-29)




(1-30)




(1-31)




(1-32)




(1-33)




(1-34)




(1-35)




(1-36)

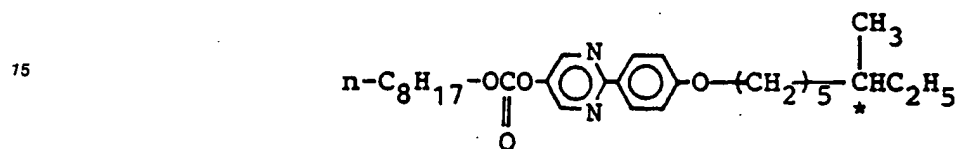


(1-37)




(1-38)

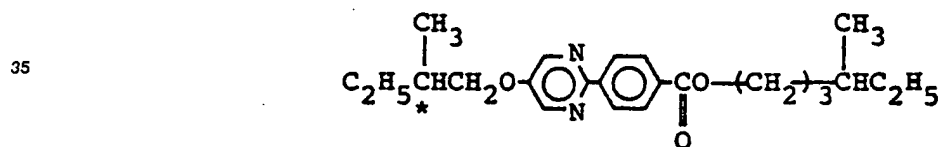


(1-39)

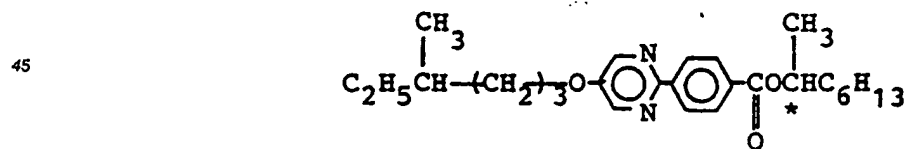


(1-40)




(1-41)



(1-42)

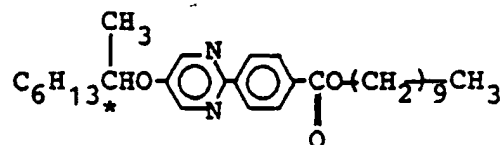

(1-43)



The compounds represented by the formula (I) may be synthesized through processes as disclosed by, e.g., Japanese Laid-Open patent Applications (KOKAI) 200972/1986, 200973/1986, 215372/1986 and 291574/1986. For example, the following reaction scheme may be used for the synthesis.

5

10

15

20

25

30


35

40

45

50


55

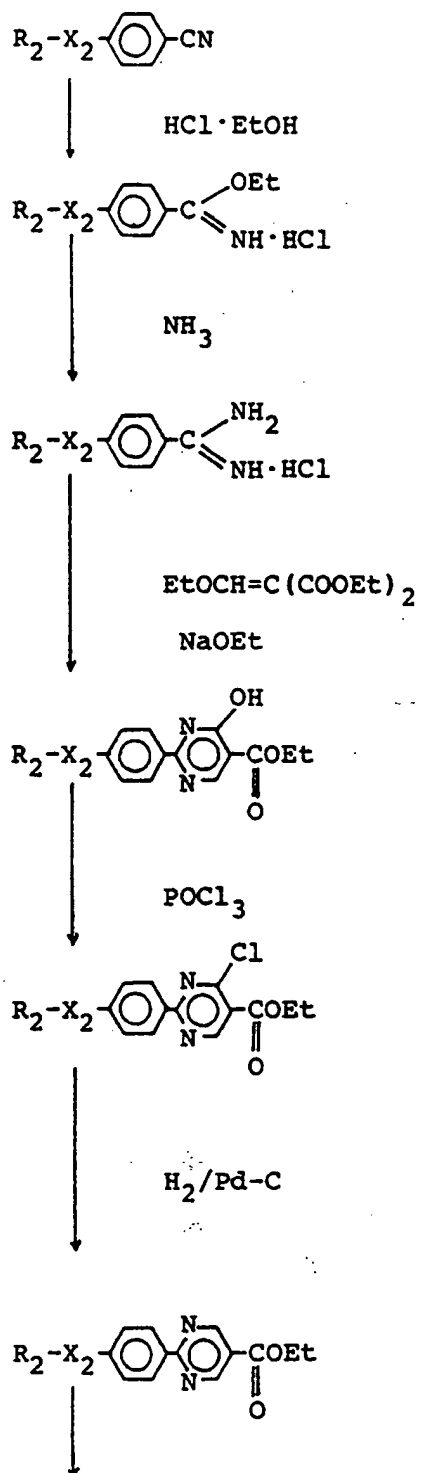

5

10

15

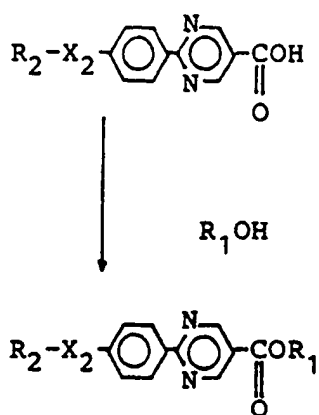

R₁, R₂ and X₂ are the same as defined above.

Specific examples of the compounds represented by the above-mentioned general formula (II) may include those shown by the following structural formulas.

20

25

30

35


40

45

50


55

(2-1)




5

(2-2)




10

(2-3)



15


(2-4)



20

25


(2-5)



30

35

(2-6)




40

45


50

55


(2-7)




(2-8)




(2-9)




(2-10)




(2-11)




(2-12)




(2-13)




(2-14)




(2-15)




(2-16)




(2-17)




(2-18)




(2-19)




(2-20)




(2-21)




(2-22)




(2-23)




(2-24)




(2-25)




(2-26)




(2-27)




(2-28)




(2-29)




(2-30)




(2-31)




(2-32)




(2-33)




(2-34)




(2-35)




(2-36)




(2-37)




(2-38)



(2-39)




(2-40)



(2-41)


5



10

(2-42)


15



20

(2-43)


25



30

(2-44)


35



40

(2-45)


45




50

55


(2-46)




(2-47)




(2-48)




(2-49)




(2-50)




(2-51)




(2-52)




(2-53)



(2-54)




(2-55)



(2-56)


5



10

(2-57)


15



20

(2-58)


25



30

(2-59)


35



40

(2-60)


45



50


55

(2-61)




10

(2-62)




20

(2-63)




30

(2-64)

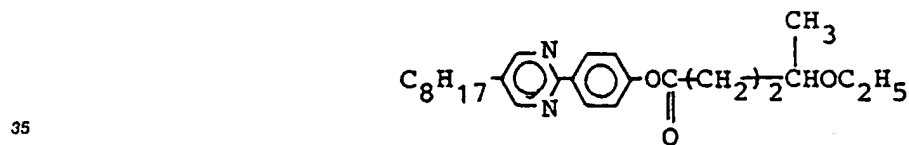

40

(2-65)




50

55

(2-66)


5



10

(2-67)


15



20

(2-68)


25



30

(2-69)


35



40

(2-70)

45




50

55

(2-71)


5



10

(2-72)


15



20

(2-73)


25



30

(2-74)


35



40

(2-75)

45




50

55

(2-76)


5



10

(2-77)


15



20


(2-78)

25



30


(2-79)



35

(2-80)


40



45

(2-81)


50



55

(2-82)


5



10

(2-83)


15



20


(2-84)

25



30


(2-85)



35

(2-86)


40



45


(2-87)

50




55


(2-88)




(2-89)




(2-90)




(2-91)




(2-92)




(2-93)

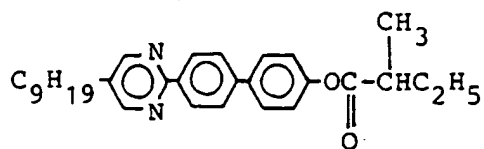


(2-94)




(2-95)



(2-96)




(2-97)



(2-98)


5



10

(2-99)


15



20

(2-100)


25



30

(2-101)


35



40

(2-102)


45



50


55

(2-103)




5

(2-104)




10

(2-105)




20

(2-106)




25

(2-107)




35

(2-108)



40

(2-109)




50

55

(2-110)


5



10

(2-111)


15



20


(2-112)

25



30


(2-113)



35

(2-114)


40



45

(2-115)


50



55

(2-116)


5



10

(2-117)


15



20

(2-118)


25



30

(2-119)


35



40

(2-120)


45




50

55


(2-121)




(2-122)




(2-123)




(2-124)




(2-125)



(2-126)




(2-127)




5

(2-128)




10

(2-129)




20

(2-130)




25

(2-131)



35

(2-132)




40

45

50


55

(2-133)



5


(2-134)



10

15

(2-135)




20

25

The compounds represented by the formula (II) may be synthesized through process as disclosed by, e.g., East Germany Patent No. 95892 (1973) and Japanese Patent Publication (KOKOKU) 5434/1987. More specifically, for example, compounds represented by the formula:

30



35


40

45

50

55

may be synthesized through the following reaction scheme:

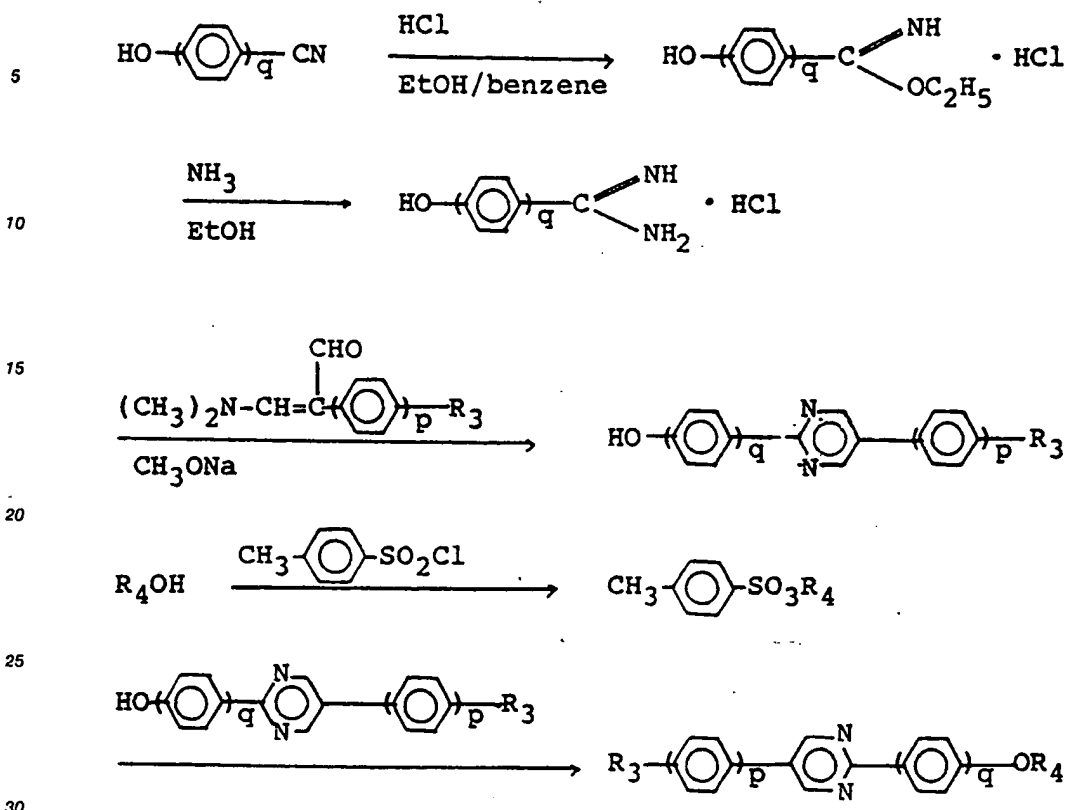

R₃, R₄, p and q are the same as defined above.

A representative example of synthesis of a compound represented by the formula (II) is described below.

Synthesis Example 1

(Synthesis of compound Example No. 2 - 60)


40 A solution of 1.83 g (9.6 mmol) of p-toluenesulfonic acid chloride in 5 ml of pyridine was added dropwise to a solution of 1.06 g (8.0 mmol) of 5-methoxyhexanol in 5 ml of pyridine below 5 °C on an iced water bath. After stirring for 6 hours at room temperature, the reaction mixture was injected into 100 ml of cold water and, after being acidified with 6N-hydrochloric acid, was extracted with isopropyl ether. The organic layer was washed with water and dried with anhydrous magnesium sulfate, followed by distilling-off of the solvent to obtain 5-methoxyhexyl-p-toluenesulfonate.

45 Separately, 2.0 g (6.41 mmol) of 5-decyl-2-(p-hydroxyphenyl)pyrimidine and 0.61 g of potassium hydroxide were added to 10 ml of dimethylformamide, and the mixture was stirred for 40 min. at 100 °C. To the mixture was added the above-prepared 5-methoxyhexyl-p-toluenesulfonate followed by 4 hours of stirring under heating at 100 °C. After the reaction, the reaction mixture was poured into 100 ml of cold water and extracted with benzene, followed by washing with water, drying with anhydrous magnesium sulfate and distilling-off of the solvent, to obtain a pale yellow oily product. The product was purified by column chromatography (silica gel - ethyl acetate/benzene = 1/9) and recrystallized from hexane to obtain 1.35 g of 5-decyl-2-[4-(5'-methoxyhexyloxy)phenyl]pyrimidin.

50

55


Phas transition temperature ($^{\circ}\text{C}$)



10 In a preferred embodiment, the ferroelectric chiral smectic liquid crystal composition according to the present invention further comprises a mesomorphic compound having a negative dielectric anisotropy, which is preferably selected from those represented by the following formulas (III-1) to (III-5):


Formula (III-1):

15




wherein Ra and Rb respectively denote a linear or branched alkyl group capable of having a substituent; Xa and Xd respectively denote a single bond, -O-,

25




30 Xb and Xc respectively denote a single bond,

35




or -CH₂CH₂-; Aa and Ab respectively denote a single bond,

40



45



with proviso that when Aa and Ab are both single bonds, Xb and Xc are both single bonds, and Xa and Xd are both single bonds or -O-, or Xa is

55



and Xd is


5



and Ya and Yb are respectively cyano group, halogen or hydrogen with proviso that Ya and Yb cannot be
10 hydrogen simultaneously;


Formula (III-2):

15




wherein Re and Rf respectively denote a linear or branched alkyl group capable of having a substituent; Xe
20 and Xh are respectively a single bond, -O-,

25




Xf and Xg are respectively

30



or a single bond; and Ae and Af are respectively

35



40




45 or a single bond with proviso that Ae and Af cannot be a single bond simultaneously;


50

55


Formula (III-3):

wherein A_i is a single bond or

10


15 A_j is a single bond,

20



R_i and R_j are respectively a linear or branched alkyl group capable of having a substituent with proviso that R_i and R_j are linear alkyl groups when A_j is a single bond; Z_1 is -O- or -S-; X_i and X_k are respectively a single bond, -O-,


25



30


 X_j is a single bond,

35



-CH₂O- or -OCH₂ with proviso that X_i is a single bond when A_i is a single bond, X_j is not a single bond when A_j is

40




45

and X_k is a single bond when A_j is a single bond;


Formula (III-4):

50




55

wherein R_l and R_m are respectively a linear or branched alkyl group capable of having a substituent; A_l and A_m are respectively a single bond,




5 with proviso that Al and Am cannot be a single bond simultaneously; XI is a single bond, -O-,



10

and Xm is a single bond,




15

-CH₂O-, -OCH₂-, -CH₂CH₂- or -C≡C-;

20


Formula (III-5):



25


wherein Rn and Ro are respectively a linear or branched alkyl group capable of having a substituent; Xn and Xq are respectively a single bond, -O-,

30



35


Xo and Xp are respectively a single bond,



40


-CH₂O-, -OCH₂- or -CH₂CH₂-; An and Ap are respectively a single bond,

45



Ao is

50



55

and Z₂ is



10 In the above formulas (III-1) to (III-5), the alkyl groups Ra - Ro may respectively have 1 - 18 carbon atoms, preferably 4 - 16 carbon atoms, further preferably 6 - 12 carbon atoms.

Specific examples of mesomorphic compounds represented by the general formulas (III-1) to (III-5) may respectively include those denoted by the structural formulas shown below.

15

20

25

30

35

40


45

50


55

Formula (III-1)


(3-1)




(3-2)




(3-3)

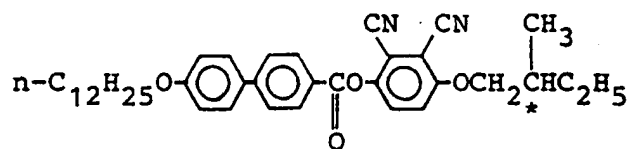


(3-4)

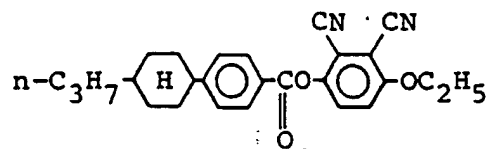


(3-5)

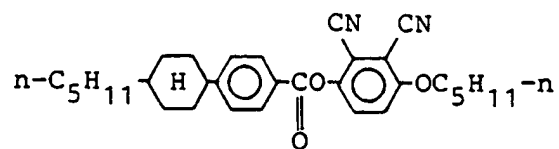


(3-6)

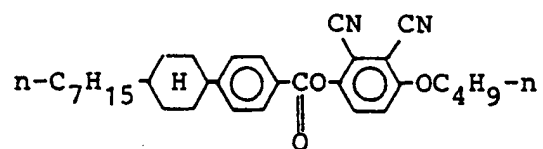


(3-7)



(3-8)




(3-9)



(3-10)


5

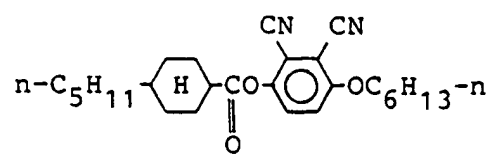

10

(3-11)


15



20

(3-12)


25



30

(3-13)


35



40

(3-14)


45




50

55


(3-15)

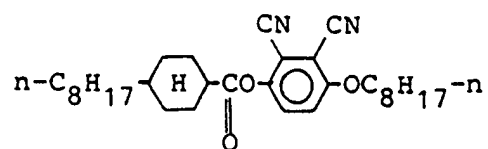


(3-16)

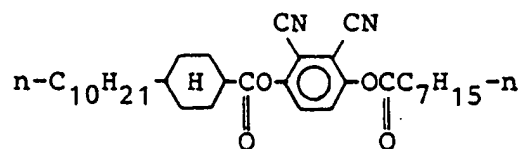


(3-17)




(3-18)



(3-19)




(3-20)




10

(3-21)

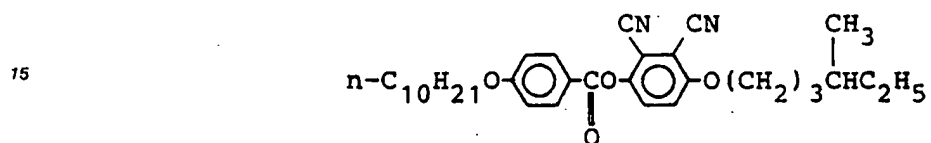


20

(3-22)




30

(3-23)




(3-24)



45


(3-25)



55

(3-26)


5



10

(3-27)


15



20

(3-28)


25



30

(3-29)


35



40

(3-30)

45




50

55

(3-31)


5



10

(3-32)


15



20

(3-33)


25



30

(3-34)


35



40

(3-35)


45

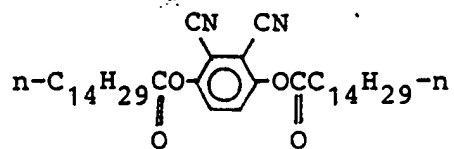


50

55


(3-36)




(3-37)

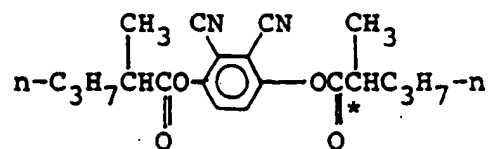


(3-38)




(3-39)




(3-40)




(3-41)

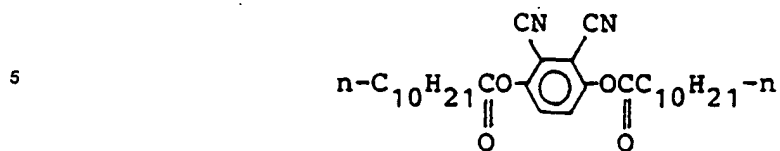


(3-42)

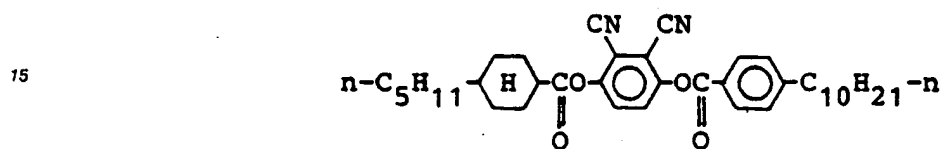


(3-43)




(3-44)

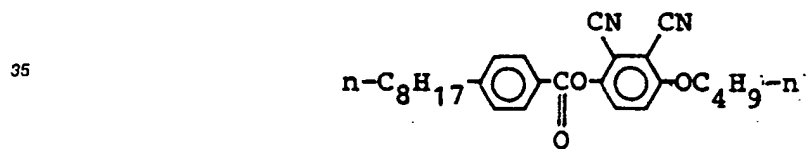


(3-45)

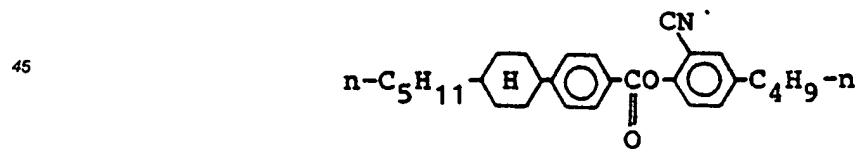


(3-46)

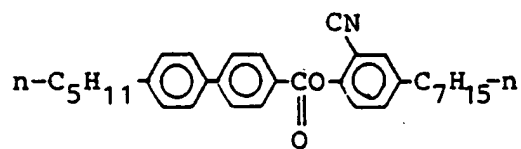


(3-47)




(3-48)

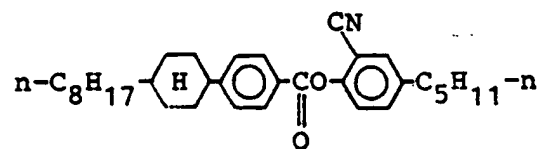

(3-49)




(3-50)



(3-51)


5

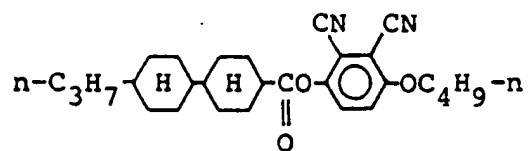

10

(3-52)


15

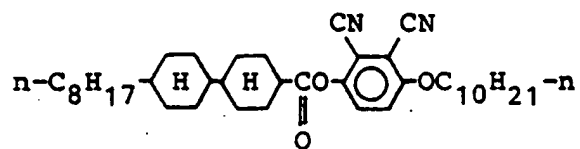

20

(3-53)


25

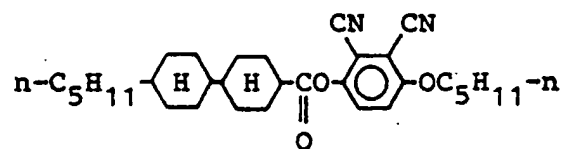

30

(3-54)


35

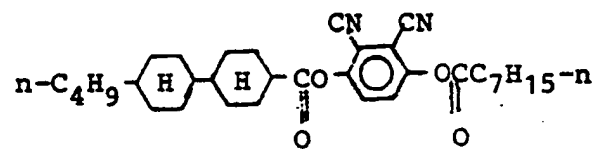

40

(3-55)

45

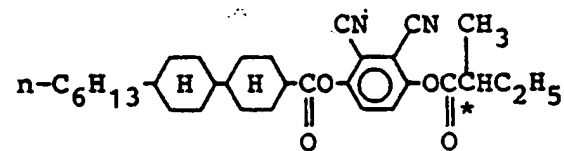


50

55

(3-56)


5



10

(3-57)


15



20

(3-58)


25



30

(3-59)


35



40

(3-60)


45



50


55

(3-61)




10

(3-62)

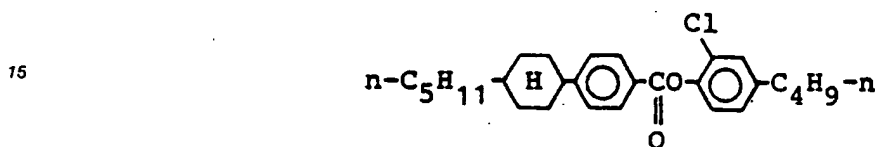


20

(3-63)

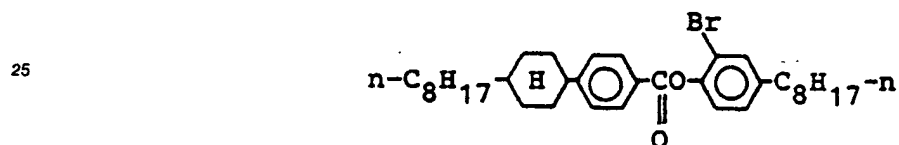


30

(3-64)

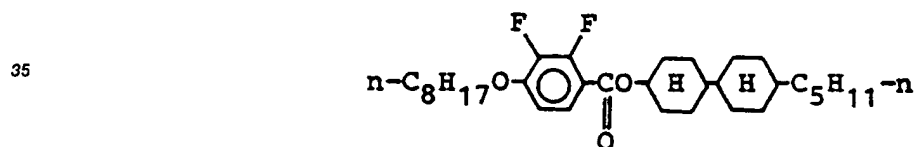

40

(3-65)




50

55

(3-66)


5



10

(3-67)


15



20

(3-68)


25



30

(3-69)

35

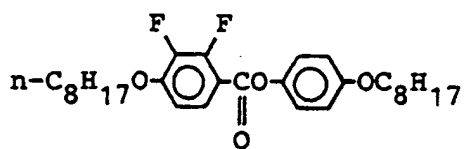

40

45


50

55

Formula (III-2)

(3-70)


5



10

(3-71)

15



20

(3-72)


25



30

(3-73)


35



40

(3-74)


45




50

55


(3-75)




(3-76)




(3-77)




(3-78)




(3-79)




(3-80)




(3-81)




(3-82)




(3-83)




(3-84)




(3-85)



(3-86)




(3-87)



5


(3-88)



10

15

(3-89)



20

25

30

35

40

45


50

55

Formula (III-3)

(3-90)


5



10

(3-91)


15



20

(3-92)

25



30

35


40

45


50

55


(3-93)




(3-94)




(3-95)




(3-96)




(3-97)



(3-98)




(3-99)



5


(3-100)



10


15

(3-101)



20


(3-102)



25

30


(3-103)



35


40

(3-104)



45


(3-105)




50

55


(3-106)




(3-107)




(3-108)




(3-109)

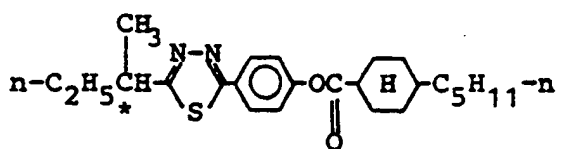


(3-110)

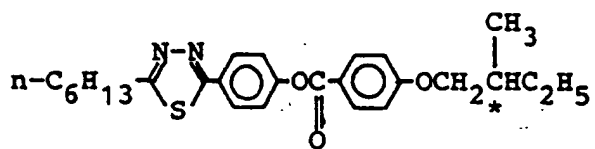


(3-111)




(3-112)




(3-113)




(3-114)




(3-115)




(3-116)



(3-117)




(3-118)



5


(3-119)



10

15

(3-120)



20

25

30

35

40

45


50

55

Formula (III-4)


(3-121)

5




(3-122)

10



(3-123)


15



20

(3-124)

25



30

35


40

45

50


55

(3-125)




5

(3-126)




10

(3-127)




15

(3-128)




20

(3-129)




25

(3-130)




30

(3-131)



35

(3-132)




40

45


50

55


(3-133)




(3-134)




(3-135)




(3-136)




(3-137)




(3-138)



(3-139)




(3-140)




5

(3-141)




10

(3-142)



15


(3-143)



20

25


(3-144)



30


35

(3-145)



40

(3-146)

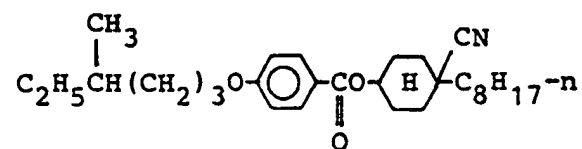


45

50


55

(3-147)

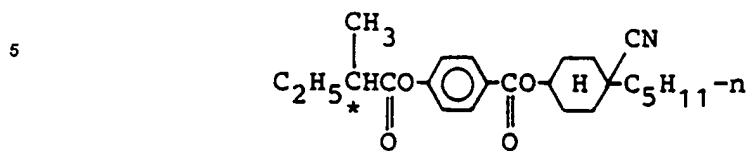


10

(3-148)




(3-149)




25

(3-150)



35

(3-151)



45


50

55

Formula (III-5)

(3-152)


5



10

(3-153)

15



20

25

30

35


40

45


50

55


(3-154)




(3-155)




(3-156)




(3-157)



(3-158)




(3-159)




(3-160)

5



(3-161)


10



15

(3-162)


20



25


(3-163)

30



(3-164)


35



40

(3-165)


45

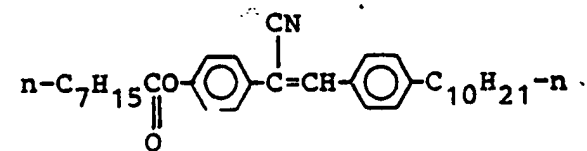


50

55


(3-166)




(3-167)




(3-168)




(3-169)



(3-170)




(3-171)




55


(3-172)




(3-173)




(3-174)




(3-175)



(3-176)




(3-177)




55

(3-178)

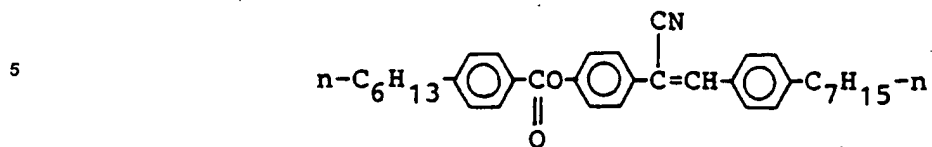


10

(3-179)




20

(3-180)




25

(3-181)




35

(3-182)




(3-183)




50

55


(3-184)



(3-185)



(3-186)




The mesomorphic compound having a negative dielectric anisotropy $\Delta\epsilon$ may preferably have $\Delta\epsilon < -2$, preferably $\Delta\epsilon < -5$, further preferably $\Delta\epsilon < -10$.

The liquid crystal composition according to the present invention may be obtained by mixing at least one species of the compound represented by the formula (I), at least one species of the compound represented by the formula (II), optionally at least one species of a mesomorphic compound having a negative dielectric anisotropy and another mesomorphic compound in appropriate proportions. The liquid crystal composition according to the present invention may preferably be formulated as a ferroelectric liquid crystal composition, particularly a ferroelectric chiral smectic liquid crystal composition.


Specific examples of another mesomorphic compound as described above may include those denoted by the following structure formulas.

(1)




10


(2)

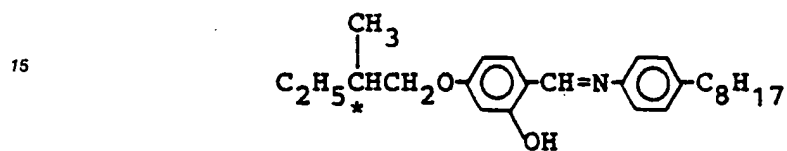


(3)




(4)




(5)




(6)




(7)




(8)




(9)




(10)




(11)




(12)




(13)




(14)




(15)




(16)



(17)




(18)




15

(19)




25


(20)



(21)




(22)




45

(23)




55


(24)




(25)




(26)




(27)



(28)




(29)




55


(30)




(31)




(32)

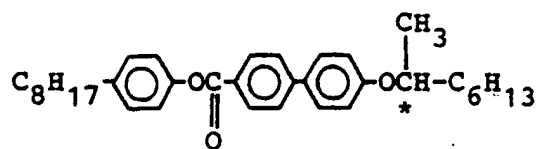

(33)




(34)




10




(40)




(41)

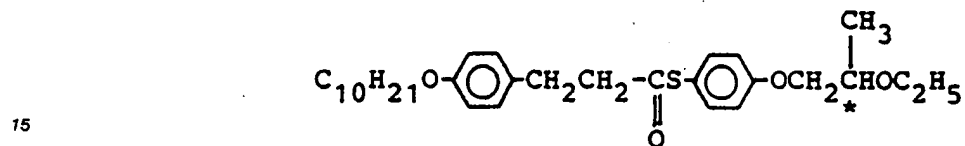


(42)

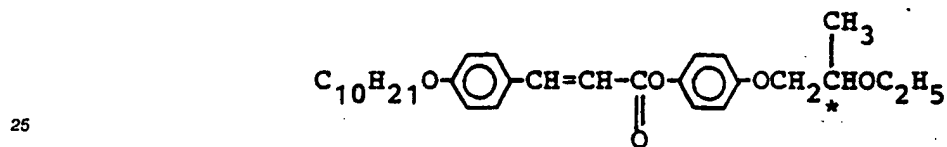

(43)

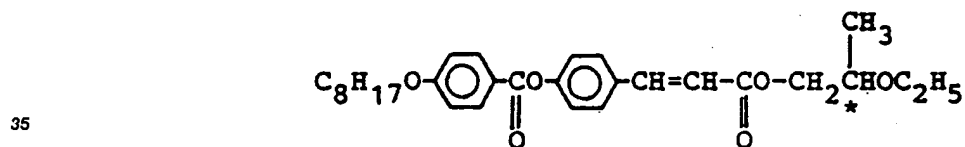


(44)

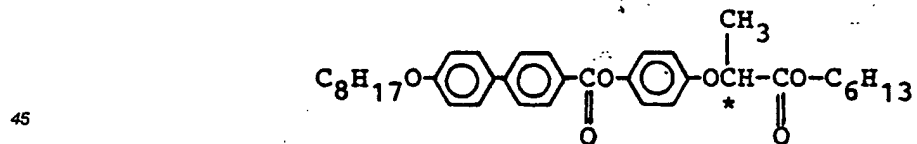


50

55


(45)

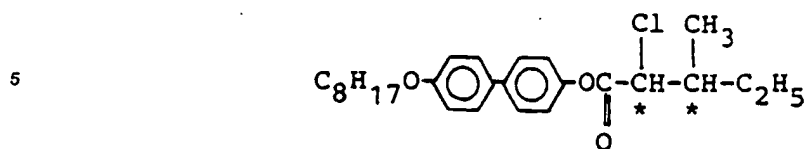


(46)

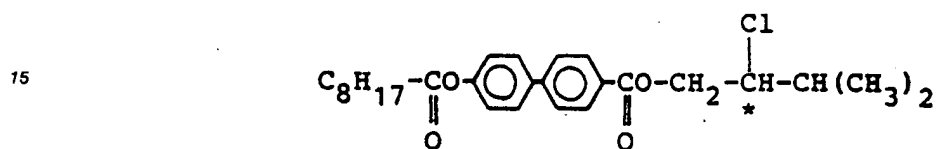


(47)

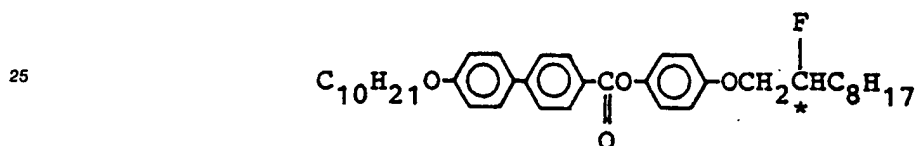


(48)




(49)

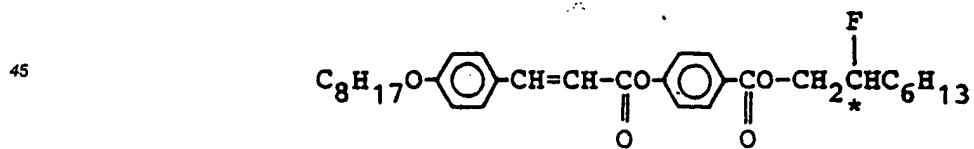


(50)

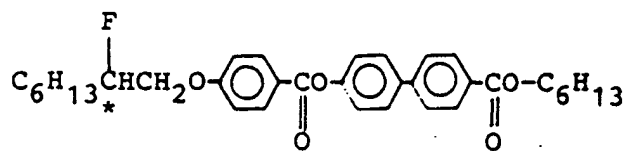


(51)

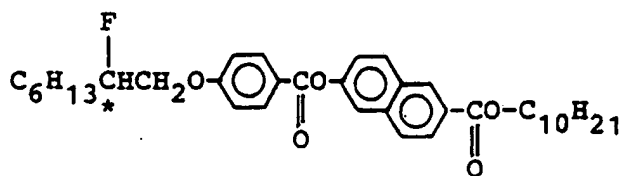


(52)




(53)

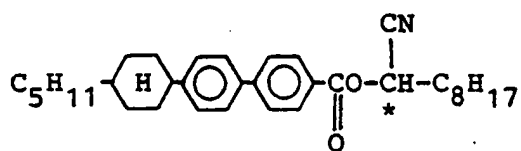


(54)




(55)

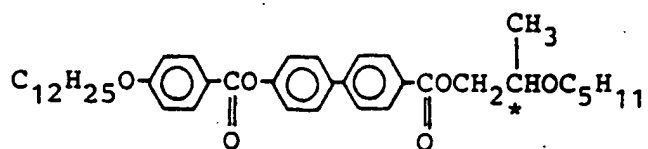


(56)




(57)




(58)




(59)




(60)




(61)




(62)




(63)




(64)




(65)




(66)




(67)




(68)




(69)

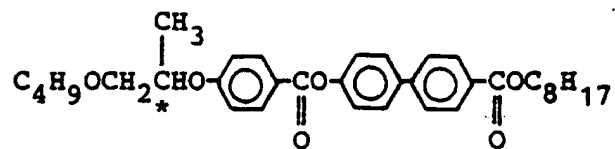


(70)

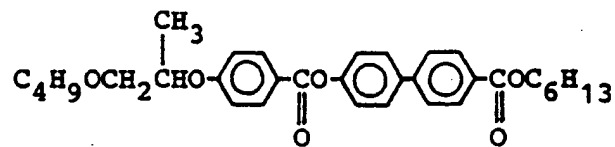


(71)

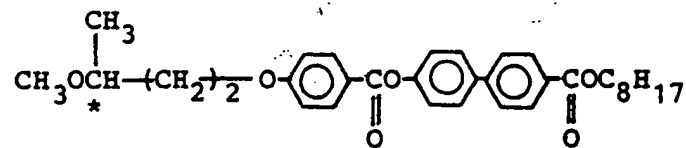


(72)

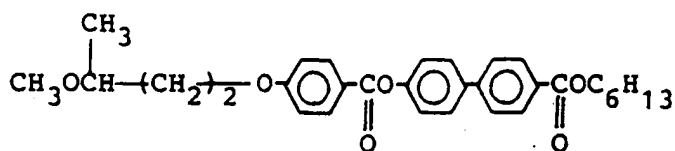


(73)



(74)

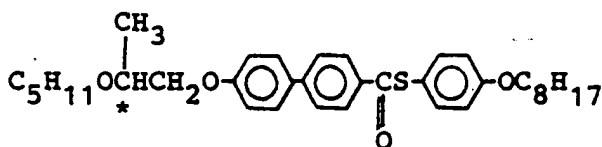

(75)

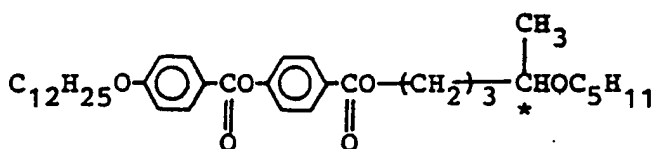

In formulating the liquid crystal composition according to the present invention, it is desirable to mix 1 - 300 wt. parts each, preferably 2 - 100 wt. parts each, of a compound represented by the formula (I) and a compound represented by the formula (II) with 100 wt. parts of another mesomorphic compound as mentioned above which can be composed of two or more species.

Further, when two or more species of either one or both of the compounds represented by the formulas (I) and (II) are used, the two or more species of the compound of the formula (I) or (II) may be used in a total amount of 1 - 500 wt. parts, preferably 2 - 100 wt. parts, per 100 wt. parts of another mesomorphic compound as described above which can be composed of two or more species.

Further, the weight ratio of the compound of the formula (I)/the compound of the formula (II) may desirably be 1/300 - 300/1, preferably 1/50 - 50/1. When two or more species each of the compounds of the formulas (I) and (II) are used, the weight ratio of the total amount of the compounds of the formula (I)/the total amounts of the compounds of the formula (II) may desirably be 1/500 - 500/1, preferably 1/50 - 50/1.

Further, the total amounts of the compounds of the formulas (I) and (II) may desirably be 2 - 600 wt. parts, preferably 4 - 200 wt. parts, when one species each is selected from the formulas (I) and (II), or 2 - 1000 wt. parts, preferably 4 - 200 wt. parts, when two or more species are selected from at least one of the formulas (I) and (II), respectively, with respect to 100 wt. parts of the above-mentioned another mesomorphic compound which may be composed of two or more species.

Further, a mesomorphic compound having a negative dielectric anisotropy as described above can be contained in a proportion of 1 - 98 wt. % of the liquid crystal composition of the present invention so as to provide a composition having a negative dielectric anisotropy. Particularly, when a mesomorphic compound having $\Delta\epsilon < -2$ is based, it may be contained in a proportion of 1 - 70 wt. %, preferably 1 - 50 wt. %, of the liquid crystal composition of the present invention.

Further, the total of the compounds of the formulas (I) and (II) and the mesomorphic compound having a negative dielectric anisotropy can constitute 3 - 100 wt. % of the liquid crystal composition of the present invention.

The ferroelectric liquid crystal device according to the present invention may preferably be prepared by heating the liquid crystal composition prepared as described above into an isotropic liquid under vacuum, filling a blank cell comprising a pair of oppositely spaced electrode plates with the composition, gradually cooling the cell to form a liquid crystal layer and restoring the normal pressure.

Figure 1 is a schematic sectional view of an embodiment of the ferroelectric liquid crystal device prepared as described above for explanation of the structure thereof.

Referring to Figure 1, the ferroelectric liquid crystal device includes a ferroelectric liquid crystal layer 1 disposed between a pair of glass substrates 2 each having thereon a transparent electrode 3 and an insulating alignment control layer 4. Lead wires 6 are connected to the electrodes so as to apply a driving voltage to the liquid crystal layer 1 from a power supply 7. Outside the substrates 2, a pair of polarizer 8 are disposed so as to modulate incident light I_0 from a light source 9 in cooperation with the liquid crystal 1 to provide modulated light I.

Each of two glass substrates 2 is coated with a transparent electrode 3 comprising a film of In_2O_3 , SnO_2 or ITO (indium-tin-oxide) to form an electrode plate. Further thereon, an insulating alignment control layer 4 is formed by rubbing a film of a polymer such as polyimide with gauze or acetate fiber-planted cloth so as to align the liquid crystal molecules in the rubbing direction. Further, it is also possible to compose the alignment control layer of two layers, e.g., by first forming an insulating layer of an inorganic material such as silicon nitride, silicon nitride containing hydrogen, silicon carbide, silicon carbide containing hydrogen, silicon oxide, boron nitride, boron nitride containing hydrogen, cerium oxide, aluminum oxide, zirconium oxide, titanium oxide, or magnesium fluoride, and forming thereon an alignment control layer of an organic insulating material, such as polyvinyl alcohol, polyimide, polyamide-imide, polyester-imide, polyparaxylylene, polyester, polycarbonate, polyvinyl acetal, polyvinyl chloride, polyvinyl acetate, polyamide, polystyrene, cellulose resin, melamine resin, urea resin, acrylic resin, or photoresist resin. Alternatively, it is also possible to use a single layer of inorganic insulating alignment control layer or organic insulating alignment control layer. An inorganic insulating alignment control layer may be formed by vapor deposition, while an organic insulating alignment control layer may be formed by applying a selection of an organic insulating material or a precursor thereof in a concentration of 0.1 to 20 wt. %, preferably 0.2 - 10 wt. %, by spinner coating, dip coating, screen printing, spray coating or roller coating, followed by curing or hardening under prescribed hardening condition (e.g., by heating). The insulating alignment control layer may have a thickness of ordinarily 30 Å - 1 micron, preferably 30 - 3000 Å, further preferably 50 - 1000 Å. The two glass substrates 2 with transparent electrodes 3 (which may be inclusively referred to herein as "electrode plates") and further with insulating alignment control layers 4 thereof are held to have a prescribed (but arbitrary) gap with a spacer 5. For example, such a cell structure with a prescribed gap may be formed by sandwiching spacers of silica beads or alumina beads having a prescribed diameter with two glass plates, and then sealing the periphery thereof with, e.g., an epoxy adhesive. Alternatively, a polymer film or glass fiber may also be used as a spacer. Between the two glass plates, a ferroelectric liquid crystal is sealed up to provide a ferroelectric liquid crystal layer 1 in a thickness of generally 0.5 to 20 microns, preferably 1 to 5 microns.

The ferroelectric liquid crystal provided by the composition of the present invention may desirably assume a SmC^* phase (chiral smectic C phase) in a wide temperature range including room temperature (particularly, broad in a lower temperature side) and also shows wide drive voltage margin and drive temperature margin when contained in a device.

Particularly, in order to show a good alignment characteristic to form a uniform monodomain, the ferroelectric liquid crystal may show a phase transition series comprising isotropic phase - Ch phase (cholesteric phase) - SmA phase (smectic A phase) - SmC^* phase (chiral smectic C phase) on temperature decreases.

The transparent electrodes 3 are connected to the external power supply 7 through the lead wires 6. Further, outside the glass substrates 2, polarizers 8 are applied. The device shown in Figure 1 is of a transmission type and is provided with a light source 9.

Figure 2 is a schematic illustration of a ferroelectric liquid crystal cell (device) for explaining operation thereof. Reference numerals 21a and 21b denote substrates (glass plates) on which a transparent electrode of, e.g., In_2O_3 , SnO_2 , ITO (indium-tin-oxide), etc., is disposed, respectively. A liquid crystal of an SmC* phase (chiral smectic C phase) in which liquid crystal molecular layers 22 are aligned perpendicular to surfaces of the glass plates is hermetically disposed therebetween. Full lines 23 show liquid crystal molecules. Each liquid crystal molecule 23 has a dipole moment (P_{\perp}) 24 in a direction perpendicular to the axis thereof. The liquid crystal molecules 23 continuously form a helical structure in the direction of extension of the substrates. When a voltage higher than a certain threshold level is applied between electrodes formed on the substrates 21a and 21b, a helical structure of the liquid crystal molecule 23 is unwound or released to change the alignment direction of respective liquid crystal molecules 23 so that the dipole moments (P_{\perp}) 24 are all directed in the direction of the electric field. The liquid crystal molecules 23 have an elongated shape and show refractive anisotropy between the long axis and the short axis thereof. Accordingly, it is easily understood that when, for instance, polarizers arranged in a cross nicol relationship, i.e., with their polarizing directions crossing each other, are disposed on the upper and the lower surfaces of the glass plates, the liquid crystal cell thus arranged functions as a liquid crystal optical modulation device of which optical characteristics vary depending upon the polarity of an applied voltage.

Further, when the liquid crystal cell is made sufficiently thin (e.g., less than about 10 microns), the helical structure of the liquid crystal molecules is unwound to provide a non-helical structure even in the absence of an electric field, whereby the dipole moment assumes either of the two states, i.e., P_a in an upper direction 34a or P_b in a lower direction 34b as shown in Figure 3, thus providing a bistable condition. When an electric field E_a or E_b higher than a certain threshold level and different from each other in polarity as shown in Figure 3 is applied to a cell having the above-mentioned characteristics, the dipole moment is directed either in the upper direction 34a or in the lower direction 34b depending on the vector of the electric field E_a or E_b . In correspondence with this, the liquid crystal molecules are oriented in either of a first stable state 33a and a second stable state 33b.

When the above-mentioned ferroelectric liquid crystal is used as an optical modulation element, it is possible to obtain two advantages. First is that the response speed is quite fast. Second is that the orientation of the liquid crystal shows bistability. The second advantage will be further explained, e.g., with reference to Figure 3. When the electric field E_a is applied to the liquid crystal molecules, they are oriented in the first stable state 33a. This state is stably retained even if the electric field is removed. On the other hand, when the electric field E_b of which direction is opposite to that of the electric field E_a is applied thereto, the liquid crystal molecules are oriented to the second stable state 33b, whereby the directions of molecules are changed. This state is similarly stably retained even if the electric field is removed. Further, as long as the magnitude of the electric field E_a or E_b being applied is not above a certain threshold value, the liquid crystal molecules are placed in the respective orientation states.

When such a ferroelectric liquid crystal device comprising a ferroelectric liquid crystal composition as described above between a pair of electrode plates is constituted as a simple matrix display device, the device may be driven by a driving method as disclosed in Japanese Laid-Open Patent Applications (KOKAI) Nos. 193426/1984, 193427/1984, 156046/1985, 156047/1985, etc.

More specifically, such a ferroelectric liquid crystal device may for example be driven by a driving embodiment as described hereinbefore with reference to Figures 3 to 7.

Hereinbelow, the present invention will be explained more specifically, with reference to examples. It is however to be understood that the present invention is not restricted to these examples.

45 Example 1

A liquid crystal composition 1-A was prepared by mixing the following compounds in respectively indicated proportions.

50

55

| Ex. Compound No. | Structural formula | Wt.parts |
|------------------------|--------------------|----------|
|------------------------|--------------------|----------|



| | | |
|----|--|----|
| 5 | | |
| 8 | $\text{C}_8\text{H}_{17}\text{O}-\text{C}_6\text{H}_4-\text{COS}-\text{C}_6\text{H}_4-\text{CH}_2-\underset{\text{*}}{\overset{\text{CH}_3}{\text{CH}}}\text{C}_2\text{H}_5$ | 45 |
| 10 | | |
| 9 | $\text{C}_{12}\text{H}_{25}\text{O}-\text{C}_6\text{H}_4-\text{COS}-\text{C}_6\text{H}_4-\text{CH}_2-\underset{\text{*}}{\overset{\text{CH}_3}{\text{CH}}}\text{C}_2\text{H}_5$ | 45 |
| 15 | | |
| 12 | $\text{C}_8\text{H}_{17}\text{O}-\text{C}_6\text{H}_4-\text{COS}-\text{C}_6\text{H}_4-\text{OCH}_2-\underset{\text{*}}{\overset{\text{CH}_3}{\text{CH}}}\text{C}_2\text{H}_5$ | 15 |
| 20 | | |
| 13 | $\text{C}_{10}\text{H}_{21}\text{O}-\text{C}_6\text{H}_4-\text{COS}-\text{C}_6\text{H}_4-\text{OCH}_2-\underset{\text{*}}{\overset{\text{CH}_3}{\text{CH}}}\text{C}_2\text{H}_5$ | 15 |
| 25 | | |
| 17 | $\text{C}_8\text{H}_{17}\text{O}-\underset{\text{*}}{\overset{\text{CH}_3}{\text{CH}}}\text{CH}_2\text{O}-\text{C}_6\text{H}_4-\text{COO}-\text{C}_6\text{H}_4-\text{C}_6\text{H}_4-\text{COOC}_6\text{H}_{13}$ | 30 |
| 30 | | |
| 18 | $\text{C}_5\text{H}_{11}\text{O}-\underset{\text{*}}{\overset{\text{CH}_3}{\text{CH}}}\text{CH}_2\text{O}-\text{C}_6\text{H}_4-\text{COO}-\text{C}_6\text{H}_4-\text{C}_6\text{H}_4-\text{COOC}_{10}\text{H}_{21}$ | 30 |
| 35 | | |
| 67 | $\text{C}_4\text{H}_9\text{OCH}_2\text{CH}_2\text{O}-\text{C}_6\text{H}_4-\text{COO}-\text{C}_6\text{H}_4-\text{C}_6\text{H}_4-\text{COOC}_6\text{H}_{13}$ | 10 |
| 40 | | |

A liquid crystal composition 1-B was prepared by mixing the following Example compounds Nos. 1-6 and 2-23 with the above prepared composition 1-A.

**Ex.Comp.
No.**

Structural formula

Wt.parts



Composition 1-A

85

The above-prepared liquid crystal composition 1-B was used to prepare a liquid crystal device in combination with a blank cell prepared in the following manner.

Two 1.1 mm-thick glass plates were provided and respectively coated with an ITO film to form an electrode for voltage application, which was further coated with an insulating layer of vapor-deposited SiO₂. The insulating layer was further coated with a 1.0 %-solution of polyimide resin precursor (SP-510, available from Toray K.K.) in dimethylacetamide by a spinner coater rotating at 3000 rpm for 15 seconds. Thereafter, the coating film was subjected to heat curing at 300 °C for 60 min. to obtain about 120 Å-thick film. The coating film was rubbed with acetate fiber-planted cloth. The thus treated two glass plates were washed with isopropyl alcohol. After silica beads with an average particle size of 1.5 microns were dispersed on one of the glass plates, the two glass plates were applied to each other with a bonding sealing agent (Lixon Bond, available from Chisso K.K.) so that their rubbed directions were parallel to each other and heated at 100 °C for 60 min. to form a blank cell. The cell gap was found to be about 1.5 microns as measured by a Berek compensator.

Then, the above-prepared liquid crystal composition 1-B was heated into an isotropic liquid, and injected into the above prepared cell under vacuum and, after sealing, was gradually cooled at a rate of 20 °C/hour to 25 °C to prepare a ferroelectric liquid crystal device.

The ferroelectric liquid crystal device was subjected to measurement of a driving voltage margin ΔV (= $V_3 - V_1$) by using the driving waveforms (bias ratio = 1/3) described with reference to Figures 4A and 4B and setting Δt so as to provide V_1 of about 15 volts. The results are shown below.

| | 10 °C | 25 °C | 40 °C |
|--|---------------------------|---------------------------|-------------------------|
| Voltage margin ΔV (set Δt) | 11.5 V (800 μ sec) | 12.0 V (230 μ sec) | 9.5 V (70 μ sec) |

Further, when the temperature was changed while the voltage ($V_S + V_1$) was set at a central value within the voltage margin, the temperature difference capable of driving (hereinafter called "(driving) temperature margin") was ± 3.0 °C.

Further, contrast of 9 was attained at 25 °C during the driving.

Comparative Example 1

A liquid crystal composition 1-C was prepared by omitting Example compound No. 2-23 from the liquid crystal composition 1-B, i.e., by adding only Example compound No. 1-6 to the liquid crystal composition 1-A, and a liquid crystal composition 1-D was prepared by omitting Example compound No. 1-6 from the composition 1-B, i.e., by adding only Example compound No. 2-23 to the composition 1-A.

Ferroelectric liquid crystal devices 1-A, 1-C and 1-D were prepared by using the compositions 1-A, 1-C and 1-D, respectively, instead of the composition 1-B, and subjected to measurement of driving voltage margin ΔV , otherwise in the same manner as in Example 1. The results are shown below.

| Voltage margin ΔV (set Δt) | | | |
|---|-----------------------|------------------------|----------------------|
| | 10 °C | 25 °C | 40 °C |
| 1-A | 9 V (1050 μ sec) | 9.5 V (280 μ sec) | 8.5 V (78 μ sec) |
| 1-C | 10 V (900 μ sec) | 10.5 V (250 μ sec) | 9 V (75 μ sec) |
| 1-D | 9.5 V (900 μ sec) | 9.5 V (250 μ sec) | 8 V (75 μ sec) |

Further, the driving temperature margin with respect to 25 °C was ± 2.2 °C for 1-A, ± 2.5 °C for 1-C and ± 2.4 °C for 1-D.

As apparent from the above Example 1 and Comparative Example 1, the ferroelectric liquid crystal device containing the liquid crystal composition 1-B according to the present invention provided wider driving voltage and temperature margins and showed a better performance of retaining good images in resistance to changes in environmental temperature and cell gap.




Example 2

A liquid crystal composition 2-B was prepared by mixing the following example compounds in the indicated proportions with the liquid crystal composition 1-A prepared in Example 1.

Ex.Comp.
No.

Structural formula

wt.parts



Composition 1-A

100

A ferroelectric liquid crystal device was prepared in the same manner as in Example 1 except that the above liquid crystal composition 2-B was used, and the device was subjected to measurement of driving voltage margin and observation of switching states. In the device, a mono domain with a good and uniform alignment characteristic was observed. The results of the measurement are shown below.

| | 10 °C | 25 °C | 40 °C |
|----------------------------------|------------------------|------------------------|----------------------|
| Voltage margin (set Δt) | 12.5 V (750 μ sec) | 12.5 V (230 μ sec) | 9.5 V (70 μ sec) |

Further, the driving temperature margin with respect to 25 °C was ± 3.3 °C. A contrast of 8 was attained during the drive at the temperature.

Comparativ Examples 2

A liquid crystal composition 2-C was prepared by omitting Example compound No. 2-57 from the liquid crystal composition 2-B, i.e., by adding only Example compounds Nos. 1-5 and 1-17 to the liquid crystal composition 1-A, and a liquid crystal composition 2-D was prepared by omitting Example compounds Nos.

1-5 and 1-17 from the composition 2-B, i.e., by adding only Example compound No. 2-57 to the composition 1-A.

Ferroelectric liquid crystal devices 1-A, 2-C and 2-D were prepared by using the compositions 1-A, 2-C and 2-D, respectively, instead of the composition 1-B, and subjected to measurement of driving voltage margin ΔV , otherwise in the same manner as in Example 1. The results are shown below.

| Voltage margin ΔV (set Δt) | | | |
|---|----------------------|-----------------------|----------------------|
| | 10 °C | 25 °C | 40 °C |
| 1-A | 9 V (1050 μ sec) | 9.5 V (280 μ sec) | 8.5 V (78 μ sec) |
| 2-C | 10 V (900 μ sec) | 11 V (250 μ sec) | 9 V (75 μ sec) |
| 2-D | 10 V (900 μ sec) | 10 V (250 μ sec) | 8 V (75 μ sec) |

Further, the driving temperature margin with respect to 25 °C was ± 2.2 °C for 1-A, ± 2.6 °C for 2-C and ± 2.4 °C for 2-D.

As apparent from the above Example 2 and Comparative Example 2, the ferroelectric liquid crystal device containing the liquid crystal composition 2-B according to the present invention provided wider driving voltage and temperature margins and showed a better performance of retaining good images in resistance to changes in environmental temperature and cell gap.

Example 3

A liquid crystal composition 3-B was prepared by mixing the following example compounds in the indicated proportions with the liquid crystal composition 1-A prepared in Example 1.

| <u>Ex.Comp.</u> <u>No.</u> | <u>Structural formula</u> | <u>wt.parts</u> |
|-------------------------------|---------------------------|-----------------|
| 1-4 | | 15 |
| 2-82 | | 10 |
| Composition 1-A | | 75 |

A ferroelectric liquid crystal device was prepared in the same manner as in Example 1 except that the above liquid crystal composition 3-B was used, and the device was subjected to measurement of driving voltage margin and observation of switching states. In the device, a monodomain with a good and uniform alignment characteristic was observed. The results of the measurement are shown below.

| | 10 °C | 25 °C | 40 °C |
|----------------------------------|------------------------|------------------------|-----------------------|
| Voltage margin (set Δt) | 12.5 V (700 μ sec) | 13.0 V (220 μ sec) | 11.0 V (75 μ sec) |

Further, the driving temperature margin with respect to 25 °C was ± 3.7 °C. A contrast of 10 was attained during the drive at the temperature.

Comparative Example 3

A liquid crystal composition 3-C was prepared by omitting Example compound No. 2-82 from the liquid crystal composition 3-B, i.e., by adding only Example compound No. 1-4 to the liquid crystal composition 1-A, and a liquid crystal composition 3-D was prepared by omitting Example compound No. 1-4 from the composition 3-B, i.e., by adding only Example compound No. 2-82 to the composition 1-A.

Ferroelectric liquid crystal devices 1-A, 3-C and 3-D were prepared by using the compositions 1-A, 3-C and 3-D, respectively, instead of the composition 1-B, and subjected to measurement of driving voltage margin ΔV , otherwise in the same manner as in Example 1. The results are shown below.

| Voltage margin ΔV (set Δt) | | | |
|---|------------------------|------------------------|----------------------|
| | 10 °C | 25 °C | 40 °C |
| 1-A | 9 V (1050 μ sec) | 9.5 V (280 μ sec) | 8.5 V (78 μ sec) |
| 3-C | 10 V (800 μ sec) | 11 V (240 μ sec) | 9 V (75 μ sec) |
| 3-D | 10.5 V (800 μ sec) | 11.0 V (240 μ sec) | 9.5 V (75 μ sec) |

Further, the driving temperature margin with respect to 25 °C was ± 2.2 °C for 1-A, ± 2.8 °C for 3-C and ± 2.7 °C for 3-D.

As apparent from the above Example 3 and Comparative Example 3, the ferroelectric liquid crystal device containing the liquid crystal composition 3-B according to the present invention provided wider driving voltage and temperature margins and showed a better performance of retaining good images in resistance to changes in environmental temperature and cell gap.



Example 4

A liquid crystal composition 4-B was prepared by mixing the following example compounds in the indicated proportions with the liquid crystal composition 1-A prepared in Example 1.

Ex.Comp.
No.

Structural formula

wt.parts



Composition 1-A

80

A ferroelectric liquid crystal device was prepared in the same manner as in Example 1 except that the above liquid crystal composition 4-B was used, and the device was subjected to measurement of driving voltage margin and observation of switching states. In the device, a monodomain with a good and uniform alignment characteristic was observed. The results of the measurement are shown below.

| | 10 °C | 25 °C | 40 °C |
|----------------------------------|------------------------|------------------------|----------------------|
| Voltage margin (set Δt) | 12.0 V (840 μ sec) | 12.5 V (220 μ sec) | 9.5 V (70 μ sec) |

Further, the driving temperature margin with respect to 25 °C was ± 3.1 °C. A contrast of 9 was attained during the drive at the temperature.

Comparative Example 4

A liquid crystal composition 4-C was prepared by omitting Example compound No. 2-9 from the liquid crystal composition 4-B, i.e., by adding only Example compound No. 1-15 to the liquid crystal composition 1-A, and a liquid crystal composition 4-D was prepared by omitting Example compound No. 1-15 from the composition 4-B, i.e., by adding only Example compound No. 2-9 to the composition 1-A.

Ferroelectric liquid crystal devices 1-A, 4-C and 4-D were prepared by using the compositions 1-A, 4-C and 4-D, respectively, instead of the composition 1-B, and subjected to measurement of driving voltage margin ΔV , otherwise in the same manner as in Example 1. The results are shown below.

| Voltage margin ΔV (set Δt) | | | |
|---|------------------------|------------------------|----------------------|
| | 10 °C | 25 °C | 40 °C |
| 1-A | 9.0 V (1050 μ sec) | 9.5 V (280 μ sec) | 8.5 V (78 μ sec) |
| 4-C | 10.0 V (900 μ sec) | 10.0 V (250 μ sec) | 9.0 V (75 μ sec) |
| 4-D | 9.0 V (900 μ sec) | 9.5 V (250 μ sec) | 8.0 V (75 μ sec) |









Further, the driving temperature margin with respect to 25 °C was ± 2.2 °C for 1-A, ± 2.5 °C for 4-C and ± 2.4 °C for 4-D.

As apparent from the above Example 4 and Comparative Example 4, the ferroelectric liquid crystal device containing the liquid crystal composition 4-B according to the present invention provided wider driving voltage and temperature margins and showed a better performance of retaining good images in resistance to changes in environmental temperature and cell gap.

Example 5




A liquid crystal composition 5-A was prepared by mixing the following compounds in respectively indicated proportions.

| Ex. Compound No. | Structural formula | Wt. parts |
|------------------------|--------------------|-----------|
|------------------------|--------------------|-----------|



A liquid crystal composition 5-B was prepared by mixing the following Example compounds Nos. 1-3, 2-73 and 2-83 with the above prepared composition 5-A.

| Ex.Comp.No. | Structural formula | wt.parts |
|-------------|--------------------|----------|
|-------------|--------------------|----------|



| Composition 5-A | 70 |
|-----------------|----|
|-----------------|----|

A ferroelectric liquid crystal device 5-B was prepared in the same manner as in Example 1 except that the liquid crystal composition 5-B was used instead of the composition 1-B. The device was subjected to measurement of driving voltage margin and observation of switching states. In the device, a monodomain with a good and uniform alignment characteristic was observed. The results of the measurement are shown below.

| | 10 °C | 25 °C | 40 °C |
|-------------------------|-------------------|-------------------|------------------|
| Voltage margin (set Δt) | 14.0 V (720 μsec) | 14.0 V (230 μsec) | 11.0 V (74 μsec) |

Further, the driving temperature margin with respect to 25 °C was ±4.1 °C. A contrast of 8 was attained during the drive at the temperature.

Comparative Example 5

A liquid crystal composition 5-C was prepared by omitting Example compounds Nos. 2-73 and 2-83 from the liquid crystal composition 5-B prepared in Example 5, i.e., by adding only Example compound No. 1-3 to the liquid crystal composition 5-A, and a liquid crystal composition 5-D was prepared by omitting Example compound No. 1-3 from the composition 5-B, i.e., by adding only Example compounds Nos. 2-73 and 2-83 to the composition 5-A.

Ferroelectric liquid crystal devices 5-A, 5-C and 5-D were prepared by using the compositions 5-A, 5-C and 5-D, respectively, instead of the composition 1-B, and subjected to measurement of driving voltage margin ΔV, otherwise in the same manner as in Example 1. The results are shown below.

| Voltage margin ΔV (set Δt) | | | |
|----------------------------|--------------------|-------------------|-----------------|
| | 10 °C | 25 °C | 40 °C |
| 5-A | 10.5 V (1200 μsec) | 10.5 V (330 μsec) | 8.5 V (98 μsec) |
| 5-C | 11.0 V (1000 μsec) | 11.0 V (300 μsec) | 9.0 V (95 μsec) |
| 5-D | 11.5 V (1000 μsec) | 11.5 V (300 μsec) | 9.5 V (95 μsec) |



Further, the driving temperature margin with respect to 25 °C was ±2.5 °C for 5-A, ±2.7 °C for 5-C and ±2.8 °C for 5-D.

As apparent from the above Example 5 and Comparative Example 5, the ferroelectric liquid crystal device containing the liquid crystal composition 5-B according to the present invention provided wider driving voltage and temperature margins and showed a better performance of retaining good images in

resistance to changes in environmental temperature and cell gap.

Example 6

- 5 A liquid crystal composition 6-B was prepared by mixing the following example compounds in the indicated proportions with the liquid crystal composition 5-A prepared in Example 5.

| 10 Ex.Comp. No. | Structural formula | wt.parts |
|--------------------|---|----------|
| 15 1-7 |  | 5 |
| 20 2-67 |  | 5 |
| Composition 5-A | | 90 |

25

A ferroelectric liquid crystal device was prepared in the same manner as in Example 1 except that the above liquid crystal composition 6-B was used, and the device was subjected to measurement of driving voltage margin and observation of switching states. In the device, a monodomain with a good and uniform alignment characteristic was observed. The results of the measurement are shown below.

30

| | 10 °C | 25 °C | 40 °C |
|-------------------------|--------------------|-------------------|-----------------|
| Voltage margin (set Δt) | 12.5 V (1000 μsec) | 12.5 V (300 μsec) | 9.0 V (95 μsec) |

35

Further, the driving temperature margin with respect to 25 °C was ±3.0 °C. A contrast of 9 was attained during the drive at the temperature.

Comparative Example 6

40

A liquid crystal composition 6-C was prepared by omitting Example compound No. 2-67 from the liquid crystal composition 6-B, i.e., by adding only Example compound No. 1-7 to the liquid crystal composition 5-A, and a liquid crystal composition 6-D was prepared by omitting Example compound No. 1-7 from the composition 6-B, i.e., by adding only Example compound No. 2-67 to the composition 5-A.

45

Ferroelectric liquid crystal devices 5-A, 6-C and 6-D were prepared by using the compositions 5-A, 6-C and 6-D, respectively, instead of the composition 1-B, and subjected to measurement of driving voltage margin ΔV, otherwise in the same manner as in Example 1. The results are shown below.

50

| Voltage margin ΔV (set Δt) | | | |
|----------------------------|--------------------|-------------------|-----------------|
| | 10 °C | 25 °C | 40 °C |
| 5-A | 10.5 V (1200 μsec) | 10.5 V (330 μsec) | 8.5 V (98 μsec) |
| 6-C | 10.5 V (1000 μsec) | 11.5 V (300 μsec) | 8.5 V (95 μsec) |
| 6-D | 10.5 V (1000 μsec) | 10.5 V (300 μsec) | 8.0 V (95 μsec) |




55

Further, the driving temperature margin with respect to 25 °C was ±2.5 °C for 5-A, ±2.7 °C for 6-C and ±2.6 °C for 6-D.

As apparent from the above Example 6 and Comparative Example 6, the ferroelectric liquid crystal device containing the liquid crystal composition 6-B according to the present invention provided wider driving voltage and temperature margins and showed a better performance of retaining good images in resistance to changes in environmental temperature and cell gap.

Example 7

A liquid crystal composition 7-B was prepared by mixing the following example compounds in the indicated proportions with the liquid crystal composition 5-A prepared in Example 5.

| <u>Ex. Comp. No.</u> | <u>Structural formula</u> | <u>wt. parts</u> |
|----------------------|--|------------------|
| 1-11 |  | 5 |
| 1-16 |  | 5 |
| 2-21 |  | 10 |
| Composition 5-A | | 80 |

A ferroelectric liquid crystal device was prepared in the same manner as in Example 1 except that the above liquid crystal composition 7-B was used, and the device was subjected to measurement of driving voltage margin and observation of switching states. In the device, a monodomain with a good and uniform alignment characteristic was observed. The results of the measurement are shown below.

| | 10 °C | 25 °C | 40 °C |
|-------------------------|-------------------|-------------------|-----------------|
| Voltage margin (set Δt) | 13.0 V (850 μsec) | 13.0 V (260 μsec) | 9.5 V (90 μsec) |

Further, the driving temperature margin with respect to 25 °C was ±3.5 °C. A contrast of 10 was attained during the drive at the temperature.

Comparative Example 7

A liquid crystal composition 7-C was prepared by omitting Example compound No. 2-21 from the liquid crystal composition 7-B, i.e., by adding only Example compounds Nos. 1-11 and 1-16 to the liquid crystal composition 5-A, and a liquid crystal composition 7-D was prepared by omitting Example compounds Nos. 1-11 and 1-16 from the composition 7-B, i.e., by adding only Example compound No. 2-21 to the composition 5-A.

Ferroelectric liquid crystal devices 5-A, 7-C and 7-D were prepared by using the compositions 5-A, 7-C and 7-D, respectively, instead of the composition 1-B, and subjected to measurement of driving voltage margin ΔV, otherwise in the same manner as in Example 1. The results are shown below.

| Voltage margin ΔV (set Δt) | | | |
|---|-------------------------|------------------------|----------------------|
| | 10 °C | 25 °C | 40 °C |
| 5-A | 10.5 V (1200 μ sec) | 10.5 V (330 μ sec) | 8.5 V (98 μ sec) |
| 7-C | 11.0 V (1000 μ sec) | 11.5 V (300 μ sec) | 9.0 V (90 μ sec) |
| 7-D | 11.0 V (1000 μ sec) | 11.0 V (300 μ sec) | 9.0 V (90 μ sec) |

5

Further, the driving temperature margin with respect to 25 °C was ± 2.5 °C for 5-A, ± 2.8 °C for 7-C and ± 2.6 °C for 7-D.

10

As apparent from the above Example 7 and Comparative Example 7, the ferroelectric liquid crystal device containing the liquid crystal composition 7-B according to the present invention provided wider driving voltage and temperature margins and showed a better performance of retaining good images in resistance to changes in environmental temperature and cell gap.

15

Example 8

A liquid crystal composition 8-A was prepared by mixing the following compounds in respectively indicated proportions.

20

25

30

35

40

45

50

55





| Ex. Compound No. | Structural formula | Wt.parts |
|------------------------|--|----------|
| 24 | $\text{C}_{10}\text{H}_{21}\text{O}-\text{C}_6\text{H}_4-\text{COS}-\text{C}_6\text{H}_4-\text{OCH}_2-\underset{\text{*}}{\overset{\text{CH}_3}{\text{CH}}}-\text{OC}_3\text{H}_7$ | 10 |
| 25 | $\text{C}_{12}\text{H}_{25}\text{O}-\text{C}_6\text{H}_4-\text{COS}-\text{C}_6\text{H}_4-\text{OCH}_2-\underset{\text{*}}{\overset{\text{CH}_3}{\text{CH}}}-\text{OC}_8\text{H}_{17}$ | 20 |
| 67 | $\text{C}_4\text{H}_9\text{OCH}_2\text{CH}_2\text{O}-\text{C}_6\text{H}_4-\text{COO}-\text{C}_6\text{H}_4-\text{C}_6\text{H}_4-\text{COOC}_6\text{H}_{13}$ | 10 |
| 4 | $\text{C}_2\text{H}_5-\underset{\text{*}}{\overset{\text{CH}_3}{\text{CH}}}-\text{CH}_2-\text{C}_6\text{H}_4-\text{C}_6\text{H}_4-\text{COO}-\text{C}_6\text{H}_4-\text{OC}_8\text{H}_{17}$ | 10 |
| 5 | $\text{C}_2\text{H}_5-\underset{\text{*}}{\overset{\text{CH}_3}{\text{CH}}}-\text{CH}_2-\text{C}_6\text{H}_4-\text{C}_6\text{H}_4-\text{COO}-\text{C}_6\text{H}_4-\text{OC}_6\text{H}_{13}$ | 20 |
| 57 | $\text{C}_{10}\text{H}_{21}\text{O}-\text{C}_6\text{H}_4-\text{COO}-\text{C}_6\text{H}_4-\text{OC}_8\text{H}_{17}$ | 15 |
| 58 | $\text{C}_8\text{H}_{17}-\text{C}_6\text{H}_4-\text{COO}-\text{C}_6\text{H}_4-\text{OC}_{10}\text{H}_{21}$ | 15 |
| 47 | $\text{C}_{10}\text{H}_{21}\text{O}-\text{C}_6\text{H}_4-\text{C}_6\text{H}_4-\text{COO}-\text{C}_6\text{H}_4-\text{OCH}_2-\underset{\text{*}}{\overset{\text{F}}{\text{CH}}}-\text{C}_8\text{H}_{17}$ | 5 |
| 51 | $\text{C}_6\text{H}_{13}-\underset{\text{*}}{\overset{\text{F}}{\text{CH}}}-\text{CH}_2\text{O}-\text{C}_6\text{H}_4-\text{COO}-\text{C}_6\text{H}_4-\text{C}_6\text{H}_4-\text{COOC}_{10}\text{H}_{21}$ | 5 |

A liquid crystal composition 8-B was prepared by mixing the following Example compounds Nos. 1-4, 1-19, 2-82 and 2-102 with the above prepared composition 8-A.

**Ex.Comp.
No.**

Structural formula

Wt.parts

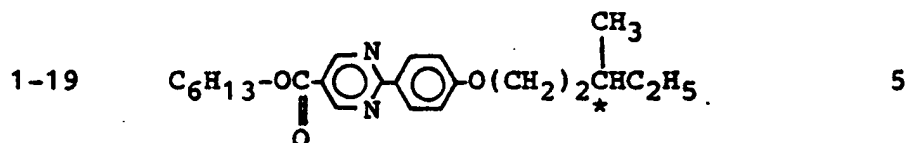

Composition 8-A

80

30 A ferroelectric liquid crystal device 8-B was prepared in the same manner as in Example 1 except that the liquid crystal composition 8-B was used instead of the composition 1-B. The device was subjected to measurement of driving voltage margin and observation of switching states. In the device, a monodomain with a good and uniform alignment characteristic was observed. The results of the measurement are shown below.

| | 10 °C | 25 °C | 45 °C |
|-------------------------|-------------------|------------------|-----------------|
| Voltage margin (set Δt) | 11.0 V (280 μsec) | 11.0 V (90 μsec) | 7.0 V (40 μsec) |

40 Further, the driving temperature margin with respect to 25 °C was ±2.7 °C. A contrast of 11 was attained during the drive at the temperature.

45 Comparative Example 8

A liquid crystal composition 8-C was prepared by omitting Example compounds Nos. 2-82 and 2-102 from the liquid crystal composition 8-B, i.e., by adding only Example compounds Nos. 1-4 and 1-19 to the liquid crystal composition 8-A, and a liquid crystal composition 8-D was prepared by omitting Example compounds Nos. 1-4 and 1-19 from the composition 8-B, i.e., by adding only Example compounds Nos. 2-82 and 2-102 to the composition 8-A.

50 Ferroelectric liquid crystal devices 8-A, 8-C and 8-D were prepared by using the compositions 8-A, 8-C and 8-D, respectively, instead of the composition 1-B, and subjected to measurement of driving voltage margin ΔV, otherwise in the same manner as in Example 1. The results are shown below.

| Voltage margin ΔV (set Δt) | | | |
|---|-----------------------|-----------------------|----------------------|
| | 10 °C | 25 °C | 40 °C |
| 8-A | 8.0 V (400 μ sec) | 8.0 V (110 μ sec) | 6.0 V (40 μ sec) |
| 8-C | 9.0 V (340 μ sec) | 9.0 V (100 μ sec) | 6.0 V (40 μ sec) |
| 8-D | 9.0 V (340 μ sec) | 9.5 V (100 μ sec) | 7.0 V (40 μ sec) |

Further, the driving temperature margin with respect to 25 °C was ± 1.9 °C for 8-A, ± 2.1 °C for 8-C and ± 2.1 °C for 8-D.

As apparent from the above Example 8 and Comparative Example 8, the ferroelectric liquid crystal device containing the liquid crystal composition 8-B according to the present invention provided wider driving voltage and temperature margins and showed a better performance of retaining good images in resistance to changes in environmental temperature and cell gap.

Example 9

A liquid crystal composition 9-B was prepared by mixing the following example compounds in the indicated proportions with the liquid crystal composition 8-A prepared in Example 8.

| Ex.Comp. No. | Structural formula | wt.parts |
|-----------------|---|----------|
| 1-23 | $\text{C}_2\text{H}_5\text{CH}(\text{CH}_3)(\text{CH}_2)_3\text{O}-\text{C}_6\text{H}_4\text{N}-\text{C}_6\text{H}_4\text{O}(\text{CH}_2)_9\text{CH}_3$ | 15 |
| 2-60 | $\text{C}_{10}\text{H}_{21}-\text{C}_6\text{H}_4\text{N}-\text{C}_6\text{H}_4\text{O}(\text{CH}_2)_4\text{CH}(\text{CH}_3)\text{OCH}_3$ | 10 |
| Composition 8-A | | 75 |

A ferroelectric liquid crystal device was prepared in the same manner as in Example 1 except that the above liquid crystal composition 9-B was used, and the device was subjected to measurement of driving voltage margin and observation of switching states. In the device, a monodomain with a good and uniform alignment characteristic was observed. The results of the measurement are shown below.

| | 10 °C | 25 °C | 40 °C |
|----------------------------------|------------------------|-----------------------|----------------------|
| Voltage margin (set Δt) | 11.0 V (260 μ sec) | 11.5 V (85 μ sec) | 7.5 V (40 μ sec) |

Further, the driving temperature margin with respect to 25 °C was ± 2.9 °C. A contrast of 10 was attained during the drive at the temperature.

Comparative Example 9

A liquid crystal composition 9-C was prepared by omitting Example compound No. 2-60 from the liquid crystal composition 9-B, i.e., by adding only Example compound No. 1-23 to the liquid crystal composition 8-A, and a liquid crystal composition 9-D was prepared by omitting Example compound No. 1-23 from the

composition 9-B, i.e., by adding only Example compound No. 2-60 to the composition 8-A.

Ferroelectric liquid crystal devices 8-A, 9-C and 9-D were prepared by using the compositions 8-A, 9-C and 9-D, respectively, instead of the composition 1-B, and subjected to measurement of driving voltage margin ΔV , otherwise in the same manner as in Example 1. The results are shown below.



| | Voltage margin ΔV (set Δt) | | |
|-----|---|-----------------------|----------------------|
| | 10 °C | 25 °C | 40 °C |
| 8-A | 8.0 V (400 μ sec) | 8.0 V (110 μ sec) | 6.0 V (40 μ sec) |
| 9-C | 9.0 V (320 μ sec) | 9.5 V (100 μ sec) | 6.0 V (40 μ sec) |
| 9-D | 9.0 V (320 μ sec) | 9.0 V (100 μ sec) | 6.0 V (40 μ sec) |

Further, the driving temperature margin with respect to 25 °C was ± 1.9 °C for 8-A, ± 2.3 °C for 9-C and ± 2.2 °C for 9-D.

As apparent from the above Example 9 and Comparative Example 9, the ferroelectric liquid crystal device containing the liquid crystal composition 9-B according to the present invention provided wider driving voltage and temperature margins and showed a better performance of retaining good images in resistance to changes in environmental temperature and cell gap.

Example 10

A liquid crystal composition 10-B was prepared by mixing the following example compounds in the indicated proportions with the liquid crystal composition 8-A prepared in Example 8.

| <u>Ex. Comp.</u> <u>No.</u> | <u>Structural formula</u> | <u>wt. parts</u> |
|--------------------------------|---|------------------|
| 1-6 |  | 20 |
| 2-23 |  | 10 |
| Composition 8-A | | 70 |

A ferroelectric liquid crystal device was prepared in the same manner as in Example 1 except that the above liquid crystal composition 10-B was used, and the device was subjected to measurement of driving voltage margin and observation of switching states. In the device, a monodomain with a good and uniform alignment characteristic was observed. The results of the measurement are shown below.

| | 10 °C | 25 °C | 40 °C |
|----------------------------------|------------------------|-----------------------|----------------------|
| Voltage margin (set Δt) | 12.0 V (240 μ sec) | 12.0 V (80 μ sec) | 8.5 V (40 μ sec) |

Further, the driving temperature margin with respect to 25 °C was ± 3.2 °C. A contrast of 9 was attained during the drive at the temperature.

Comparative Example 10

A liquid crystal composition 10-C was prepared by omitting Example compound No. 2-23 from the liquid crystal composition 10-B, i.e., by adding only Example compound No. 1-6 to the liquid crystal

composition 8-A, and a liquid crystal composition 10-D was prepared by omitting Example compound No. 1-6 from the composition 10-B, i. ., by adding only Example compound No. 2-23 to the composition 8-A.

Ferroelectric liquid crystal devices 8-A, 10-C and 10-D were prepared by using the compositions 8-A, 10-C and 10-D, respectively, instead of the composition 1-B, and subjected to measurement of driving voltage margin ΔV , otherwise in the same manner as in Example 1. The results are shown below.

| Voltage margin ΔV (set Δt) | | | |
|---|-----------------------|-----------------------|----------------------|
| | 10 °C | 25 °C | 40 °C |
| 8-A | 8.0 V (400 μ sec) | 8.0 V (110 μ sec) | 6.0 V (40 μ sec) |
| 10-C | 9.0 V (300 μ sec) | 9.5 V (100 μ sec) | 7.0 V (40 μ sec) |
| 10-D | 9.0 V (300 μ sec) | 9.0 V (100 μ sec) | 6.0 V (40 μ sec) |

Further, the driving temperature margin with respect to 25 °C was ± 1.9 °C for 8-A, $+2.4$ °C for 10-C and ± 2.2 °C for 10-D.

As apparent from the above Example 10 and Comparative Example 10, the ferroelectric liquid crystal device containing the liquid crystal composition 10-B according to the present invention provided wider driving voltage and temperature margins and showed a better performance of retaining good images in resistance to changes in environmental temperature and cell gap.

Example 11

A blank cell was prepared in the same manner as in Example 1 except for omitting the SiO₂ layer to form an alignment control layer composed of the polyimide resin layer alone on each electrode plate. Four ferroelectric liquid crystal devices were prepared by filling such a blank cell with liquid crystal compositions 2-B, 2-C, 2-D and 1-A, respectively, prepared in Example 2 and Comparative Example 2. These liquid crystal devices were subjected to measurement of driving voltage and temperature margins in the same manner as in Example 1. The results are shown below.

| Comp. | Voltage margin (set Δt) | | | Temp. margin (at 25 °C) |
|-------|----------------------------------|------------------------|-----------------------|-------------------------|
| | 10 °C | 25 °C | 40 °C | |
| 2-B | 14.0 V (720 μ sec) | 14.0 V (210 μ sec) | 10.0 V (60 μ sec) | ± 3.8 °C |
| 2-C | 10.5 V (850 μ sec) | 11.0 V (240 μ sec) | 9.5 V (75 μ sec) | ± 2.7 °C |
| 2-D | 10.0 V (850 μ sec) | 10.5 V (240 μ sec) | 9.0 V (75 μ sec) | ± 2.7 °C |
| 1-A | 9.5 V (950 μ sec) | 10.0 V (250 μ sec) | 9.0 V (75 μ sec) | ± 2.4 °C |

As is apparent from the above Example 11, also in the case of a different device structure, the device containing the ferroelectric liquid crystal composition 2-B according to the present invention provided wider driving voltage and temperature margins and showed a better performance of retaining good images in resistance to changes in environmental temperature and cell gap than the device containing the other liquid crystal compositions.

Examples 12 - 19

Liquid crystal compositions 12-B to 19-B were prepared by replacing the example compounds and the liquid crystal compositions used in Example 1, 5 and 8 with example compounds and liquid crystal compositions shown in the following Table 1. Ferroelectric liquid crystal devices were prepared by respectively using these compositions instead of the composition 1-B, and subjected to measurement of driving margins and observation of switching states. In the devices, a monodomain with a good and uniform alignment characteristic was observed. The results of the measurement are shown in the following Table 1.

Table 1

| Ex. No. (Comp. No.) | Example compound No. or liquid crystal composition No. (weight parts) | | | | | | | | | | Voltage margin (V) | | Temp. margin (°C) |
|------------------------|--|------|------|------|------|-------|-------|------|--|--|------------------------------------|-----------|-------------------------|
| | | | | | | | | | | | Set Δt (μsec) | | |
| 12 (12-B) | 1-2 | 1-10 | 1-38 | 2-2 | 2-12 | 2-17 | 2-44 | 1-A | | | 13.0 | ± 3.6 | |
| | (4) | (4) | (4) | (4) | (2) | (4) | (2) | (76) | | | 210 | | |
| 13 (13-B) | 1-6 | 1-16 | 1-43 | 2-76 | 2-86 | 2-113 | | 1-A | | | 12.5 | ± 3.4 | |
| | (5) | (5) | (5) | (2) | (3) | (2) | | (78) | | | 215 | | |
| 14 (14-B) | 1-8 | 1-21 | 1-28 | 2-59 | 2-62 | 2-69 | | 1-A | | | 13.5 | ± 3.8 | |
| | (6) | (4) | (5) | (5) | (7) | (3) | | (70) | | | 195 | | |
| 15 (15-B) | 1-31 | 1-34 | 1-42 | 2-5 | 2-14 | 2-26 | 2-133 | 5-A | | | 14.0 | ± 4.0 | |
| | (3) | (6) | (3) | (3) | (3) | (3) | (6) | (73) | | | 245 | | |
| 16 (16-B) | 1-5 | 1-34 | | 2-79 | 2-97 | 2-131 | | 5-A | | | 13.5 | ± 3.4 | |
| | (8) | (8) | | (2) | (2) | (4) | | (76) | | | 250 | | |
| 17 (17-B) | 1-16 | 1-28 | 1-42 | 2-55 | 2-58 | 2-61 | | 5-A | | | 13.5 | ± 3.5 | |
| | (5) | (5) | (5) | (2) | (2) | (4) | | (77) | | | 250 | | |

...cont.

Table 1 (cont.)

| | | | | | | | | | | |
|--------------|-----|------|------|------|------|------|-------|------|------|------|
| 18 (18-B) | 1-6 | 1-21 | 1-31 | 1-43 | 2-25 | 2-37 | 2-135 | 8-A | 12.0 | ±3.3 |
| | (5) | (5) | (5) | (3) | (4) | (5) | (3) | (70) | 77 | |
| 19 (19-B) | 1-3 | 1-10 | 1-34 | 1-40 | 2-65 | 2-71 | | 8-A | 11.5 | ±3.1 |
| | (4) | (3) | (2) | (2) | (8) | (8) | | (73) | 83 | |

As is apparent from the results shown in the above Table 1, the ferroelectric liquid crystal devices containing the liquid crystal compositions 12-B to 19-B provided wide driving voltage and temperature margins and showed good performances of retaining good images in resistance to changes in environmental temperature and cell gap.

Example 20

A liquid crystal composition 20-B was prepared by mixing the following example compound in the indicated proportion with the liquid crystal composition 1-B prepared in Example 1.

5

| <u>Ex. Comp. No.</u> | <u>Structural formula</u> | <u>wt. parts</u> |
|----------------------|---------------------------|------------------|
| 3-10 | | 10 |
| | Composition 1-B | 90 |

15

A ferroelectric liquid crystal device was prepared in the same manner as in Example 1 except that the above liquid crystal composition was used, and the device was subjected to measurement of driving voltage margin in the same manner as in Example 1 to obtain the following results.

20

| | 10 °C | 25 °C | 40 °C |
|-------------------------|-------------------|-----------------|-----------------|
| Voltage margin (set Δt) | 11.0 V (900 μsec) | 12 V (260 μsec) | 9.5 V (75 μsec) |

25

Then, the tilt angle of the above device was measured under right-angle cross nicols at 25 °C to provide 7.2 degrees. Further, the tilt angle of the device was again measured while being subjected to application of rectangular waveforms of ±8 V and a frequency of 60 KHz and found to be 13 degrees. The transmittance measured at that time was 12.7%, and a contrast of 50:1 was attained.

30

Comparative Example 20

A liquid crystal composition 20-C was prepared in the same manner as in Example 20 except that the liquid crystal composition 1-A prepared in Example 1 was used instead of the composition 1-B to be mixed with the Example compound No. 3-10 in the same proportions.

35

Ferroelectric liquid crystal devices were prepared by using the compositions 20-C, 1-A and 1-B respectively and subjected to measurement of driving voltage margin, otherwise in the same manner as in Example 1. Further, the tilt angles of these devices were measured in the same manner as in Example 20. The results are shown below.

40

| Voltage margin (set Δt) | | | |
|-------------------------|-------------------|-------------------|-----------------|
| Comp. | 10 °C | 25 °C | 40 °C |
| 1-A | 9.0 V (1050 μsec) | 9.5 V (280 μsec) | 8.5 V (78 μsec) |
| 1-B | 11.5 V (800 μsec) | 12.0 V (230 μsec) | 9.5 V (70 μsec) |
| 20-C | 8.0 V (1300 μsec) | 9.0 V (310 μsec) | 9.0 V (83 μsec) |

45

50

| Tilt angle (25 °C) | | |
|--------------------|-----------------------------|---|
| Comp. | Initial (no electric field) | Under AC appln. (60 KHz, ±8 V, rectangular) |
| 1-A | 7.5 degrees | 7.8 degrees |
| 1-B | 7.0 degrees | 7.3 degrees |
| 20-C | 7.7 degrees | 13.3 degrees |

55

As apparent from Example 20 and Comparative Example 20, the liquid crystal composition 20-B obtained by mixing a mesomorphic compound having a negative dielectric anisotropy (Example compound

No. 3-10) with the liquid crystal composition 1-B according to the present invention provided a wider driving margin and also provided a remarkably improved display characteristic when used in a display method utilizing AC application (or AC stabilization).

Example 21

A liquid crystal composition 21-B was prepared by mixing the following example compounds in the respectively indicated proportions with the liquid crystal composition 1-B prepared in Example 1.

| <u>Ex.Comp. No.</u> | <u>Structural formula</u> | <u>wt.parts</u> |
|---------------------|---------------------------|-----------------|
| 3-90 | | 5 |
| 3-12 | | 5 |
| 3-122 | | 2 |
| 3-70 | | 3 |
| 3-107 | | 3 |
| 3-111 | | 1 |
| 3-167 | | 1 |
| Composition 1-B | | 80 |

A ferroelectric liquid crystal device was prepared in the same manner as in Example 1 except that the above liquid crystal composition was used, and the device was subjected to measurement of driving voltage margin in the same manner as in Example 1 to obtain the following results.

| | 10 °C | 25 °C | 40 °C |
|----------------------------------|------------------------|----------------------|---------------------|
| Voltage margin (set Δt) | 11.0 V (850 μ sec) | 12 V (250 μ sec) | 10 V (75 μ sec) |

Then, the tilt angle of the above device was measured under right-angle cross nicols at 25 °C to provide 8.2 degrees. Further, the tilt angle of the device was again measured while being subjected to application of rectangular waveforms of ± 8 V and a frequency of 60 KHz and found to be 12.8 degrees. The transmittance measured at that time was 13%, and a contrast of 56:1 was attained.

Comparative Example 21

A liquid crystal composition 21-C was prepared in the same manner as in Example 21 except that the liquid crystal composition 1-A prepared in Example 1 was used instead of the composition 1-B to be mixed with the other example compounds in the same proportions.

Ferroelectric liquid crystal devices were prepared by using the compositions 21-C, 1-A and 1-B respectively and subjected to measurement of driving voltage margin, otherwise in the same manner as in Example 1. Further, the tilt angles of these devices were measured in the same manner as in Example 21. The results are shown below.

| Voltage margin (set Δt) | | | |
|----------------------------------|------------------------|------------------------|----------------------|
| Comp. | 10 °C | 25 °C | 40 °C |
| 1-A | 9.0 V (1050 μ sec) | 9.5 V (280 μ sec) | 8.5 V (78 μ sec) |
| 1-B | 11.5 V (800 μ sec) | 12.0 V (230 μ sec) | 9.5 V (70 μ sec) |
| 21-C | 8.5 V (1170 μ sec) | 9.0 V (320 μ sec) | 9.0 V (85 μ sec) |

| Tilt angle (25 °C) | | |
|--------------------|-----------------------------|--|
| Comp. | Initial (no electric field) | Under AC appln. (60 KHz, ± 8 V, rectangular) |
| 1-A | 7.5 degrees | 7.8 degrees |
| 1-B | 7.0 degrees | 7.3 degrees |
| 21-C | 8.3 degrees | 13.0 degrees |

As apparent from Example 21 and Comparative Example 21, the liquid crystal composition 21-B obtained by mixing mesomorphic compounds having a negative dielectric anisotropy with the liquid crystal composition 1-B according to the present invention provided a wider driving margin and also provided a remarkably improved display characteristic when used in a display method utilizing AC application (or AC stabilization).

For example, the dielectric anisotropy $\Delta\epsilon$ of a mesomorphic compound or a liquid crystal composition referred to herein may be measured in the following manner.

A 5 micron-thick homogeneous alignment cell having an electrode of 0.7 cm² in area and a homogeneous alignment layer (rubbed polyimide) on both substrates, and a 5 micron-thick homeotropic alignment cell having an electrode of 0.7 cm² in area and a homeotropic alignment layer (aligning agent: "ODS-E" available from Chisso K.K.) on both substrates, are provided. The respective cells are filled with a sample liquid crystal material (compound or composition) to prepare liquid crystal devices. The capacitances of the liquid crystal layers are measured by applying a sine wave with a frequency of 100 KHz and amplitudes of ± 0.5 V to the respective devices at a prescribed temperature set for the liquid crystal material, and the dielectric constants ϵ_{\parallel} and ϵ_{\perp} are obtained from the measured capacitance values of the respective devices, whereby the dielectric anisotropy $\Delta\epsilon$ is calculated by the equation of $\Delta\epsilon = \epsilon_{\parallel} - \epsilon_{\perp}$.

As described hereinabove, the ferroelectric liquid crystal composition according to the present invention provides a liquid crystal device which shows a good switching characteristic, a wide driving voltage margin and a wide temperature margin so that the device shows an excellent performance of retaining good images in resistance to changes in environmental temperature and cell gap. Further, the liquid crystal composition according to the present invention further containing a mesomorphic compound having a negative dielectric anisotropy, provides a liquid crystal device which retains the above-mentioned characteristics and further

shows a remarkably improved display characteristic when used in a driving method utilizing AC stabilization.


Claims

Claims for the following Contracting States: AT, BE, CH, DE, FR, GB, GR, IT, LI, LU, NL, SE

5

1. A ferroelectric chiral smectic liquid crystal composition, comprising:
at least one optically active compound represented by the following formula (I):


10



15


wherein R_1 and R_2 respectively denote a linear or branched alkyl group having 1 - 18 carbon atoms capable of having a substituent, at least one of R_1 and R_2 being optically active; X_1 denotes -O-,

20




or

25



and X_2 denotes a single bond, -O-,


30



35

or

40




and

45


at least one compound represented by the following formula (II):

50



55

wherein R_3 and R_4 respectively denote a linear or branched optically inactive alkyl group having 1 - 18 carbon atoms capable of having an alkoxy group of 1 - 12 carbon atoms; X_3 and X_4 respectively denote a single bond, -O-,



5

and m and n are respectively 0, 1 or 2 with proviso that both of m and n are not 0.

2. A composition according to Claim 1, which further comprises a mesomorphic compound having a negative dielectric anisotropy.

10

3. A composition according to Claim 2, wherein said mesomorphic compound having a negative dielectric anisotropy has a dielectric anisotropy $\Delta\epsilon$ of below -2.


4. A composition according to Claim 3, wherein said mesomorphic compound having a negative dielectric anisotropy has a dielectric anisotropy $\Delta\epsilon$ of below -5.

15

5. A composition according to Claim 4, wherein said mesomorphic compound having a negative dielectric anisotropy has a dielectric anisotropy $\Delta\epsilon$ of below -10.


6. A composition according to Claim 2, wherein said mesomorphic compound having a negative dielectric anisotropy is a mesomorphic compound represented by any of the following formulas (III-1) to (III-5);
Formula (III-1):

25




wherein Ra and Rb respectively denote a linear or branched alkyl group capable of having a substituent; Xa and Xd respectively denote a single bond, -O-,

35




Xb and Xc respectively denote a single bond,

40



or -CH₂CH₂-; Aa and Ab respectively denote a single bond,

50

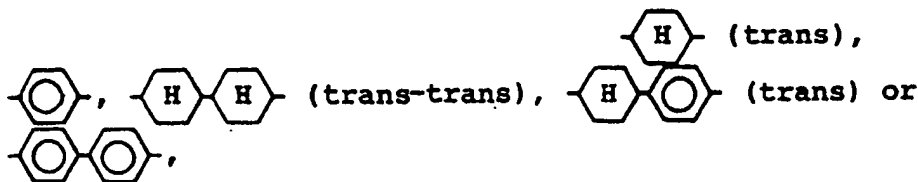

55

with proviso that when Aa and Ab are both single bonds, Xb and Xc are both single bonds, and Xa and Xd are both single bonds or -O-, or Xa is



5

and Xd is



10

and Ya and Yb are respectively cyano group, halogen or hydrogen with proviso that Ya and Yb cannot be hydrogen simultaneously;
Formula (III-2):


15



20

wherein Re and Rf respectively denote a linear or branched alkyl group capable of having a substituent;
Xe and Xh are respectively a single bond, -O-,


25



30

Xf and Xg are respectively

35



40

or a single bond; and Ae and Af are respectively




45




50

or a single bond with proviso that Ae and Af cannot be a single bond simultaneously;
Formula (III-3):


55




wherein Ai is a single bond or




Aj is a single bond,



Ri and Rj are respectively a linear or branched alkyl group capable of having a substituent with proviso that Ri and Rj are linear alkyl groups when Aj is a single bond; Z₁ is -O- or -S-; Xi and Xk are respectively a single bond, -O-,




Xj is a single bond,




-CH₂O- or -OCH₂ with proviso that Xi is a single bond when Ai is a single bond, Xj is not a single bond when Aj is




and Xk is a single bond when Aj is a single bond;
Formula (III-4):




wherein R₁ and R_m are respectively a linear or branched alkyl group capable of having a substituent; Al and Am are respectively a single bond,



with proviso that Al and Am cannot be a single bond simultaneously; X₁ is a single bond, -O-,



and Xm is a single bond,




5

-CH₂O-, -OCH₂-, -CH₂CH₂- or -C≡C-;


Formula (III-5):

10




15

wherein Rn and Ro are respectively a linear or branched alkyl group capable of having a substituent;
Xn and Xq are respectively a single bond, -O-,



20


Xo and Xp are respectively a single bond,



25


-CH₂O-, -OCH₂- or -CH₂CH₂-; An and Ap are respectively a single bond,

30




35

Ao is



40

and Z₂ is




45


- 50 7. A liquid crystal device, comprising a pair of electrode plates and a ferroelectric liquid crystal composition according to any one of Claims 1 - 6 disposed between the electrode plates.

Claims for the following Contracting State : ES


- 55 1. A process for producing a ferroelectric chiral smectic liquid crystal composition by mixing at least one optically active compound represented by the following formula (I):




wherein R_1 and R_2 respectively denote a linear or branched alkyl group having 1 - 18 carbon atoms capable of having a substituent, at least one of R_1 and R_2 being optically active; X_1 denotes -O-,




or



and X_2 denotes a single bond, -O-,




or




and

at least one compound represented by the following formula (II):




wherein R_3 and R_4 respectively denote a linear or branched optically inactive alkyl group having 1 - 18 carbon atoms capable of having an alkoxy group of 1 - 12 carbon atoms; X_3 and X_4 respectively denote a single bond, -O-,




and m and n are respectively 0, 1 or 2 with proviso that both of m and n are not 0.

2. The process according to Claim 1, wherein a further mesomorphic compound having a negative dielectric anisotropy is added.


3. The process according to Claim 2, wherein said mesomorphic compound having a negative dielectric anisotropy has a dielectric anisotropy $\Delta\epsilon$ of below -2.
4. The process according to Claim 3, wherein said mesomorphic compound having a negative dielectric anisotropy has a dielectric anisotropy $\Delta\epsilon$ of below -5.
5. The process according to Claim 4, wherein said mesomorphic compound having a negative dielectric anisotropy has a dielectric anisotropy $\Delta\epsilon$ of below -10.
6. The process according to Claim 2, wherein said mesomorphic compound having a negative dielectric anisotropy is a mesomorphic compound represented by any of the following formulas (III-1) to (III-5);
Formula (III-1):




wherein Ra and Rb respectively denote a linear or branched alkyl group capable of having a substituent; Xa and Xd respectively denote a single bond, -O-,



Xb and Xc respectively denote a single bond,



or $-\text{CH}_2\text{CH}_2-$; Aa and Ab respectively denote a single bond,

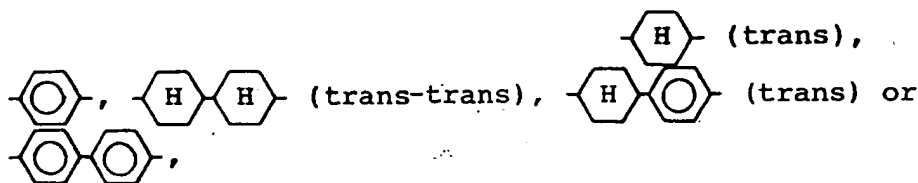

with proviso that when Aa and Ab are both single bonds, Xb and Xc are both single bonds, and Xa and Xd are both single bonds or -O-, or Xa is



and X_d is




5

and Ya and Yb are respectively cyano group, halogen or hydrogen with proviso that Ya and Yb cannot be hydrogen simultaneously;

Formula (III-2):


10



15


wherein Re and Rf respectively denote a linear or branched alkyl group capable of having a substituent; Xe and Xh are respectively a single bond, -O-;

20



Xf and Xg are respectively


25



30

or a single bond; and Ae and Af are respectively

35




40



or a single bond with proviso that Ae and Af cannot be a single bond simultaneously;

Formula (III-3):


45




50

wherein Ai is a single bond or

55



Aj is a single bond,



5 Ri and Rj are respectively a linear or branched alkyl group capable of having a substituent with proviso that Ri and Rj are linear alkyl groups when Aj is a single bond; Z₁ is -O- or -S-; Xi and Xk are respectively a single bond, -O-,




10 Xj is a single bond,




15 -CH₂O- or -OCH₂ with proviso that Xi is a single bond when Ai is a single bond, Xj is not a single bond when Aj is



20 and Xk is a single bond when Aj is a single bond;
Formula (III-4):



25 wherein Rl and Rm are respectively a linear or branched alkyl group capable of having a substituent; Al and Am are respectively a single bond,




30 with proviso that Al and Am cannot be a single bond simultaneously; Xi is a single bond, -O-,



35 and Xm is a single bond,




-CH₂O-, -OCH₂-, -CH₂CH₂- or -C≡C-;
Formula (III-5):



wherein R_n and R_o are respectively a linear or branched alkyl group capable of having a substituent;
X_n and X_q are respectively a single bond, -O-,


10



15


X_o and X_p are respectively a single bond,

20




-CH₂O-, -OCH₂- or -CH₂CH₂-; A_n and A_p are respectively a single bond,

25



A_o is


30



35

and Z₂ is

40



45

7. A liquid crystal device comprising a pair of electrode plates and a ferroelectric liquid crystal composition produced according to any one of Claims 1 - 6 disposed between the electrode plates.


Patentansprüche

Patentansprüche für folgende Vertragsstaaten : AT, BE, CH, DE, FR, GB, GR, IT, LI, LU, NL, SE

50

1. Ferroelektrische chirale smektische Flüssigkristallmischung, die mindestens eine optisch aktive Verbindung, die durch die folgende Formel (I) wiedergegeben wird:


55



worin R₁ und R₂ jeweils eine lineare oder verzweigte Alkylgruppe mit 1 bis 18 Kohlenstoffatomen


b z ichnen, die einen Substituenten hab n kann, wob i von R₁ und R₂ mindestens eine optisch aktiv ist; X₁ -O-,

5



bezeichnet und X₂ eine Einfachbindung, -O-,


10



15

bezeichnet, und
mindestens eine Verbindung enthält, die durch die folgende Formel (II) wiedergegeben wird:

20




worin R₃ und R₄ jeweils eine lineare oder verzweigte, optisch inaktive Alkylgruppe mit 1 bis 18 Kohlenstoffatomen bezeichnen, die eine Alkoxygruppe mit 1 bis 12 Kohlenstoffatomen haben kann; X₃ und X₄ jeweils eine Einfachbindung, -O-,

25

30



35



bezeichnen und m und n unter der Bedingung, daß m und n nicht beide 0 bedeuten, jeweils 0, 1 oder 2 bedeuten.

40

2. Mischung nach Anspruch 1, die ferner eine mesomorphe Verbindung mit einer negativen dielektrischen Anisotropie enthält.

45

3. Mischung nach Anspruch 2, bei der die mesomorphe Verbindung mit einer negativen dielektrischen Anisotropie eine dielektrische Anisotropie Δε hat, die unter -2 liegt.

4. Mischung nach Anspruch 3, bei der die mesomorphe Verbindung mit einer negativen dielektrischen Anisotropie eine dielektrische Anisotropie Δε hat, die unter -5 liegt.


50

5. Mischung nach Anspruch 4, bei der die mesomorphe Verbindung mit einer negativen dielektrischen Anisotropie eine dielektrische Anisotropie Δε hat, die unter -10 liegt.

6. Mischung nach Anspruch 2, b i der die mesomorphe Verbindung mit einer negativen dielektrischen Anisotropie in mesomorph V rbindung ist, die durch irgend ine d r folgenden Formeln (III-1) bis (III-5) wiedergegeben wird:

55


Formel (III-1):



5


worin Ra und Rb jeweils eine lineare oder verzweigte Alkylgruppe bezeichnen, die einen Substituenten haben kann; Xa und Xd jeweils eine Einfachbindung, -O-,

10



bezeichnen; Xb und Xc jeweils eine Einfachbindung,


15



20

oder -CH₂CH₂- bezeichnen; Aa und Ab jeweils eine Einfachbindung,

25



bezeichnen, wobei vorausgesetzt ist, daß, wenn Aa und Ab beide Einfachbindungen sind, Xb und Xc beide Einfachbindungen sind und Xa und Xd beide Einfachbindungen oder -O- sind oder Xa

30



35


ist und Xd



40

ist; und Ya und Yb jeweils eine Cyangruppe, Halogen oder Wasserstoff bezeichnen, wobei vorausgesetzt ist, daß Ya und Yb nicht gleichzeitig Wasserstoff sein können;
Formel (III-2):


45



50

worin Re und Rf jeweils eine lineare oder verzweigte Alkylgruppe bezeichnen, die einen Substituenten haben kann; Xe und Xh jeweils eine Einfachbindung, -O-,

55



bezeichnen; Xf und Xg jeweils




oder eine Einfachbindung bezeichnen und Ae und Af jeweils



oder eine Einfachbindung bezeichnen, wobei vorausgesetzt ist, daß Ae und Af nicht gleichzeitig eine Einfachbindung sein können;

15 Formel (III-3):




worin Ai eine Einfachbindung oder




bezeichnet; Aj eine Einfachbindung,




bezeichnet; Ri und Rj jeweils eine lineare oder verzweigte Alkylgruppe bezeichnen, die einen Substituenten haben kann, wobei vorausgesetzt ist, daß Ri und Rj lineare Alkylgruppen sind, wenn Aj eine Einfachbindung ist; Z₁ -O- oder -S- ist; Xi und Xk jeweils eine Einfachbindung, -O-,



40 bezeichnen; Xj eine Einfachbindung,




-CH₂O- oder -OCH₂- bezeichnet, wobei vorausgesetzt ist, daß Xi eine Einfachbindung ist, wenn Ai eine Einfachbindung ist, Xj keine Einfachbindung ist, wenn Aj



oder



ist, und Xk eine Einfachbindung ist, wenn Aj eine Einfachbindung ist;
Formel (III-4):



10 worin Rl und Rm jeweils eine lineare oder verzweigte Alkylgruppe bezeichnen, die einen Substituenten haben kann; Al und Am jeweils eine Einfachbindung,



15 bezeichnen, wobei vorausgesetzt ist, daß Al und Am nicht gleichzeitig eine Einfachbindung sein können; Xl eine Einfachbindung, -O-,




oder



30 bezeichnet und Xm eine Einfachbindung,



-CH₂O-, -OCH₂-, -CH₂CH₂- oder -C≡C- bezeichnet;
Formel (III-5):



45 worin Rn und Ro jeweils eine lineare oder verzweigte Alkylgruppe bezeichnen, die einen Substituenten haben kann; Xn und Xq jeweils eine Einfachbindung, -O-,



bezeichnen; Xo und Xp jeweils eine Einfachbindung,



-CH₂O-, -OCH₂- oder -CH₂CH₂- bezeichnen; An und Ap jeweils eine Einfachbindung,




bezeichnen; Ao



oder



ist und Z₂




ist.


7. Flüssigkristallvorrichtung mit einem Paar Elektrodenplatten und einer ferroelektrischen Flüssigkristallmischung nach einem der Ansprüche 1 bis 6, die zwischen den Elektrodenplatten angeordnet ist.

Patentansprüche für folgenden Vertragsstaat : ES


1. Verfahren zur Herstellung einer ferroelektrischen chiralen smektischen Flüssigkristallmischung durch Vermischen mindestens einer optisch aktiven Verbindung, die durch die folgende Formel (I) wiedergegeben wird:




worin R₁ und R₂ jeweils eine lineare oder verzweigte Alkylgruppe mit 1 bis 18 Kohlenstoffatomen bezeichnen, die einen Substituenten haben kann, wobei von R₁ und R₂ mindestens eine optisch aktiv ist; X₁ -O-,



bezeichnet und X₂ eine Einfachbindung, -O-,



b zeichnet, und mindestens einer Verbindung, die durch die folgende Formel (II) wiedergegeben wird:



worin R_3 und R_4 jeweils eine lineare oder verzweigte, optisch inaktive Alkylgruppe mit 1 bis 18 Kohlenstoffatomen bezeichnen, die eine Alkoxygruppe mit 1 bis 12 Kohlenstoffatomen haben kann; X_3 und X_4 jeweils eine Einfachbindung, -O-,



bezeichnen und m und n unter der Bedingung, daß m und n nicht beide 0 bedeuten, jeweils 0, 1 oder 2 bedeuten.


2. Verfahren nach Anspruch 1, bei dem eine weitere mesomorphe Verbindung mit einer negativen dielektrischen Anisotropie zugesetzt wird.

3. Verfahren nach Anspruch 2, bei dem die mesomorphe Verbindung mit einer negativen dielektrischen Anisotropie eine dielektrische Anisotropie $\Delta\epsilon$ hat, die unter -2 liegt.


4. Verfahren nach Anspruch 3, bei dem die mesomorphe Verbindung mit einer negativen dielektrischen Anisotropie eine dielektrische Anisotropie $\Delta\epsilon$ hat, die unter -5 liegt.

5. Verfahren nach Anspruch 4, bei dem die mesomorphe Verbindung mit einer negativen dielektrischen Anisotropie eine dielektrische Anisotropie $\Delta\epsilon$ hat, die unter -10 liegt.


6. Verfahren nach Anspruch 2, bei dem die mesomorphe Verbindung mit einer negativen dielektrischen Anisotropie eine mesomorphe Verbindung ist, die durch irgendeine der folgenden Formeln (III-1) bis (III-5) wiedergegeben wird:
Formel (III-1):




worin R_a und R_b jeweils eine lineare oder verzweigte Alkylgruppe bezeichnen, die einen Substituenten haben kann; X_a und X_d jeweils eine Einfachbindung, -O-,



bezeichnen; X_b und X_c jeweils eine Einfachbindung,



oder -CH₂CH₂- bezeichnen; Aa und Ab t als eine Einfachbindung,



bezeichnen, wobei vorausgesetzt ist, daß, wenn Aa und Ab beide Einfachbindungen sind, Xb und Xc beide Einfachbindungen sind und Xa und Xd beide Einfachbindungen oder -O- sind oder Xa

10



15


ist und Xd



20

ist; und Ya und Yb jeweils eine Cyangruppe, Halogen oder Wasserstoff bezeichnen, wobei vorausgesetzt ist, daß Ya und Yb nicht gleichzeitig Wasserstoff sein können; Formel (III-2):


25



30


worin Re und Rf jeweils eine lineare oder verzweigte Alkylgruppe bezeichnen, die einen Substituenten haben kann; Xe und Xh jeweils eine Einfachbindung, -O-,

35




bezeichnen; Xf und Xg jeweils

40



45


oder eine Einfachbindung bezeichnen und Ae und Af jeweils



50

oder eine Einfachbindung bezeichnen, wobei vorausgesetzt ist, daß Ae und Af nicht gleichzeitig eine Einfachbindung sein können; Formel (III-3):

55




worin Ai eine Einfachbindung oder




bezeichnet; Aj eine Einfachbindung,



bezeichnet; Ri und Rj jeweils eine lineare oder verzweigte Alkylgruppe bezeichnen, die einen Substituenten haben kann, wobei vorausgesetzt ist, daß Ri und Rj lineare Alkylgruppen sind, wenn Aj eine Einfachbindung ist; Z1 -O- oder -S- ist; Xi und Xk jeweils eine Einfachbindung, -O-,



bezeichnen; Xj eine Einfachbindung,




-CH2O- oder -OCH2- bezeichnet, wobei vorausgesetzt ist, daß Xi eine Einfachbindung ist, wenn Ai eine Einfachbindung ist, Xj keine Einfachbindung ist, wenn Aj



oder



ist, und Xk eine Einfachbindung ist, wenn Aj eine Einfachbindung ist;
Formel (III-4):



worin Ri und Rm jeweils eine lineare oder verzweigte Alkylgruppe bezeichnen, die einen Substituenten haben kann; Al und Am jeweils eine Einfachbindung,



bezeichnen, wobei vorausgesetzt ist, daß Al und Am nicht gleichzeitig eine Einfachbindung sein können; Xi eine Einfachbindung, -O-,



5


oder



10


bezeichnet und X_m eine Einfachbindung,

15



20

$\text{-CH}_2\text{O-}$, $\text{-OCH}_2\text{-}$, $\text{-CH}_2\text{CH}_2\text{-}$ oder $\text{-C}\equiv\text{C-}$ bezeichnet;
Formel (III-5):



25


worin R_n und R_o jeweils eine lineare oder verzweigte Alkylgruppe bezeichnen, die einen Substituenten haben kann; X_n und X_g jeweils eine Einfachbindung, -O- ,

30




bezeichnen; X_o und X_p jeweils eine Einfachbindung,

35



40

$\text{-CH}_2\text{O-}$, $\text{-OCH}_2\text{-}$ oder $\text{-CH}_2\text{CH}_2\text{-}$ bezeichnen; A_n und A_p jeweils eine Einfachbindung,



45

bezeichnen; A_o




50

oder



55

ist und Z_2



5.

ist.

7. Flüssigkristallvorrichtung mit einem Paar Elektrodenplatten und einer nach einem der Ansprüche 1 bis 6 hergestellten ferroelektrischen Flüssigkristallmischung, die zwischen den Elektrodenplatten angeordnet ist.


10

Revendications

Revendications pour les Etats contractants suivants : AT, BE, CH, DE, FR, GB, GR, IT, LI, LU, NL, SE

- 15 1. Composition de cristaux liquides smectiques chiraux ferro-électriques, comprenant :
au moins un composé optiquement actif représenté par la formule (I) suivante :


20



25


dans laquelle R_1 et R_2 désignent respectivement un groupe alkyle linéaire ou ramifié ayant 1 à 18 atomes de carbone pouvant porter un substituant, au moins l'un des groupes R_1 et R_2 étant optiquement actif ; X_1 représente un groupe -O-,

30



et X_2 représente une liaison simple, un groupe -O-,

35




40

et

au moins un composé représenté par la formule (II) suivante :


45



50

dans laquelle R_3 et R_4 représentent respectivement un groupe alkyle linéaire ou ramifié optiquement inactif ayant 1 à 18 atomes de carbone pouvant porter un groupe alkoxy ayant 1 à 12 atomes de carbone ; X_3 et X_4 représentent respectivement une liaison simple, un groupe -O-,


55




et m et n sont respectivement égaux à 0, 1 ou 2, sous réserve que m et n ne soient pas l'un et l'autre

égaux à 0.


2. Composition suivant la revendication 1, qui comprend en outre un composé mésomorphe ayant une anisotropie diélectrique négative.
- 5 3. Composition suivant la revendication 2, dans laquelle le composé mésomorphe ayant une anisotropie diélectrique négative possède une anisotropie diélectrique $\Delta\epsilon$ inférieure à -2.
4. Composition suivant la revendication 3, dans laquelle le composé mésomorphe possédant une anisotropie diélectrique négative possède une anisotropie diélectrique $\Delta\epsilon$ inférieure à -5.
- 10 5. Composition suivant la revendication 4, dans laquelle le composé mésomorphe ayant une anisotropie diélectrique négative possède une anisotropie diélectrique $\Delta\epsilon$ inférieure à -10.
- 15 6. Composition suivant la revendication 2, dans laquelle le composé mésomorphe ayant une anisotropie diélectrique négative est un composé mésomorphe représenté par l'une quelconque des formules (III-1) à (III-5) suivantes :
Formule (III-1):





dans laquelle Ra et Rb représentent respectivement un groupe alkyle linéaire ou ramifié pouvant porter un substituant ; Xa et Xd représentent respectivement une liaison simple, un groupe -O-,



Xb et Xc représentent respectivement une liaison simple, un groupe



ou -CH₂CH₂ ; Aa et Ab représentent respectivement une liaison simple, un groupe



sous réserve que, lorsque Aa et Ab représentent l'un et l'autre une liaison simple, Xb et Xc représentent l'un et l'autre une liaison simple, et Xa et Xd représentent l'un et l'autre une liaison simple ou un groupe -O-, ou bien Xa représente un groupe



5

et Xd représente un groupe




10

et Ya et Yb représentent respectivement un groupe cyano, un halogène ou l'hydrogène sous réserve que Ya et Yb ne puissent représenter simultanément l'hydrogène ;

15


Formule (III-2) :



20


dans laquelle Re et Rf représentent respectivement un groupe alkyle linéaire ou ramifié capable de porter un substituant ; Xe et Xh représentent respectivement une liaison simple, un groupe -O-,

25



30


Xf et Xg représentent respectivement un groupe



35

ou une liaison simple ; et Ae et Af représentent respectivement un groupe


40



45

ou une liaison simple, sous réserve que Ae et Af ne puissent représenter simultanément une liaison simple ;


Formule (III-3) :



50


55

dans laquelle Ai r prés nt un liaison simple ou un group



5


Aj représente une liaison simple, un groupe



10


Ri et Rj représentent respectivement un groupe alkyle linéaire ou ramifié pouvant porter un substituant, sous réserve que Ri et Rj représentent des groupes alkyle linéaires lorsque Aj représente une liaison simple ; Zi représente un groupe -O- ou -S- ; Xi et Xk représentent respectivement une liaison simple, un groupe -O-,

15



20


Xj représente une liaison simple, un groupe



25

-CH₂O- ou -OCH₂, sous réserve que Xi représente une liaison simple lorsque Ai représente une liaison simple, Xj ne représente pas une liaison simple lorsque Aj représente un groupe


30



35

et Xk représente une liaison simple lorsque Aj représente une liaison simple ;
Formule (III-4) :


40



45


dans laquelle R1 et Rm représentent respectivement un groupe alkyle linéaire ou ramifié pouvant porter un substituant ; Al et Am représentent respectivement une liaison simple, un groupe

50



55


sous réserve que Al et Am ne puissent représenter une liaison simple simultanément ; Xi représentent une liaison simple, un groupe -O-,



5


et X_m représente une liaison simple, un groupe

10



-CH₂O-, -OCH₂-, -CH₂CH₂ ou -C≡C- ;
Formule (III-5) ;


15



20


dans laquelle R_n et R_o représentent respectivement un groupe alkyle linéaire ou ramifié pouvant porter un substituant ; X_n et X_q représentent respectivement une liaison simple, un groupe -O-,

25



X_o et X_p représentent respectivement une liaison simple, un groupe

30



-CH₂O-, -OCH₂- ou -CH₂CH₂- ; A_n et A_p représentent respectivement une liaison simple, un groupe

35




40 ou



45


A_o représente un groupe

50



et Z₂ représente un groupe

55




7. Dispositif à cristaux liquides, comprenant une paire de plaques servant d'électrodes et une composition de cristaux liquides ferro-électriques suivant l'une quelconque des revendications 1 à 6 disposée entre les plaques servant d'électrodes.


5 **Revendications pour l'Etat contractant suivant : ES**

1. Procédé de production d'une composition de cristaux liquides smectiques chiraux ferro-électriques par mélange


d'au moins un composé optiquement actif représenté par la formule (I) suivante :



dans laquelle R_1 et R_2 désignent respectivement un groupe alkyle linéaire ou ramifié ayant 1 à 18 atomes de carbone pouvant porter un substituant, au moins l'un des groupes R_1 et R_2 étant optiquement actif ; X_1 représente un groupe -O-,




et X_2 représente une liaison simple, un groupe -O-,




et

d'au moins un composé représenté par la formule (II) suivante :




dans laquelle R_3 et R_4 représentent respectivement un groupe alkyle linéaire ou ramifié optiquement inactif ayant 1 à 18 atomes de carbone pouvant porter un groupe alkoxy ayant 1 à 12 atomes de carbone ; X_3 et X_4 représentent respectivement une liaison simple, un groupe -O-,




et m et n sont respectivement égaux à 0, 1 ou 2, sous réserve que m et n ne soient pas l'un et l'autre égaux à 0.

2. Procédé suivant la revendication 1, dans lequel un composé mésomorphe supplémentaire ayant une anisotropie diélectrique négative est ajouté.


3. Procédé suivant la revendication 2, dans lequel le composé mésomorphe ayant une anisotropie diélectrique négative possède une anisotropie diélectrique $\Delta\epsilon$ inférieure à -2.
4. Procédé suivant la revendication 3, dans lequel le composé mésomorphe ayant une anisotropie diélectrique négative possède une anisotropie diélectrique $\Delta\epsilon$ inférieure à -5.
5. Procédé suivant la revendication 4, dans lequel le composé mésomorphe ayant une anisotropie diélectrique négative possède une anisotropie diélectrique $\Delta\epsilon$ inférieure à -10.
6. Procédé suivant la revendication 2, dans lequel le composé mésomorphe ayant une anisotropie diélectrique négative est un composé mésomorphe représenté par l'une quelconque des formules (III-1) à (III-5) suivantes :
- Formule (III-1) :





dans laquelle Ra et Rb représentent respectivement un groupe alkyle linéaire ou ramifié pouvant porter un substituant ; Xa et Xd représentent respectivement une liaison simple, un groupe -O-,



Xb et Xc représentent respectivement une liaison simple, un groupe




ou -CH₂CH₂-; Aa et Ab représentent respectivement une liaison simple, un groupe

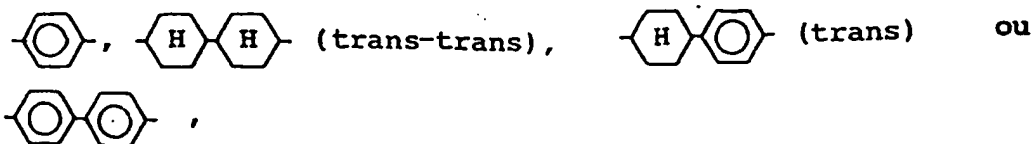

sous réserve que, lorsque Aa et Ab représentent l'un et l'autre une liaison simple, Xb et Xc représentent l'un et l'autre une liaison simple, et Xa et Xd représentent l'un et l'autre une liaison simple ou un groupe -O-, ou bien Xa représente un groupe




et Xd représente un groupe




et Ya et Yb représentent respectivement un groupe cyano, un halogène ou l'hydrogène, sous réserve que Ya et Yb ne puissent représenter simultanément l'hydrogène ;


Formule (III-2) :




dans laquelle Re et Rf représentent respectivement un groupe alkyle linéaire ou ramifié capable de porter un substituant ; Xe et Xh représentent respectivement une liaison simple, un groupe -O-,



Xf et Xg représentent respectivement un groupe




ou une liaison simple ; et Ae et Af représentent respectivement un groupe




ou une liaison simple, sous réserve que Ae et Af ne puissent représenter simultanément une liaison simple ;


Formule (III-3) :



dans laquelle Ai représente une liaison simple ou un groupe




Aj représente une liaison simple, un groupe




5 Ri et Rj représentent respectivement un groupe alkyle linéaire ou ramifié pouvant porter un substituant, sous réserve que Ri et Rj représentent des groupes alkyle linéaires lorsque Aj représente une liaison simple ; Z₁ représente un groupe -O- ou -S- ; Xi et Xk représentent respectivement une liaison simple, un groupe -O-,

10




15 Xj représente une liaison simple, un groupe



20


-CH₂O- ou -OCH₂, sous réserve que Xi représente une liaison simple lorsque Ai représente une liaison simple, Xj ne représente pas une liaison simple lorsque Aj représente un groupe

25



30 et Xk représente une liaison simple lorsque Aj représente une liaison simple ;
Formule (III-4) :

35




40 dans laquelle Rl et Rm représentent respectivement un groupe alkyle linéaire ou ramifié pouvant porter un substituant ; Al et Am représentent respectivement une liaison simple, un groupe

45




sous réserve que Al et Am ne puissent représenter simultanément une liaison simple ; Xl représente une liaison simple, un groupe -O-,

50




55 et Xm représente une liaison simple, un groupe



5


-CH₂O-, -OCH₂-, -CH₂CH₂- ou -C≡C- ; Formule (III-5) ;



10


dans laquelle R_n et R_o représentent respectivement un groupe alkyle linéaire ou ramifié pouvant porter un substituant ; X_n et X_q représentent respectivement une liaison simple, un groupe -O-,

15



20

X_o et X_p représentent respectivement une liaison simple, un groupe



25


-CH₂O-, -OCH₂- ou -CH₂CH₂- ; A_n et A_p représentent respectivement une liaison simple, un groupe

30




ou

35



40


A_o représente un groupe



45

et Z₂ représente un groupe

50



- 55 7. Dispositif à cristaux liquides, comprenant une paire de plaques servant d'électrodes et une composition de cristaux liquides ferro-électriques produite suivant l'un quelconque des revendications 1 à 6 disposée entre les plaques servant d'électrodes.

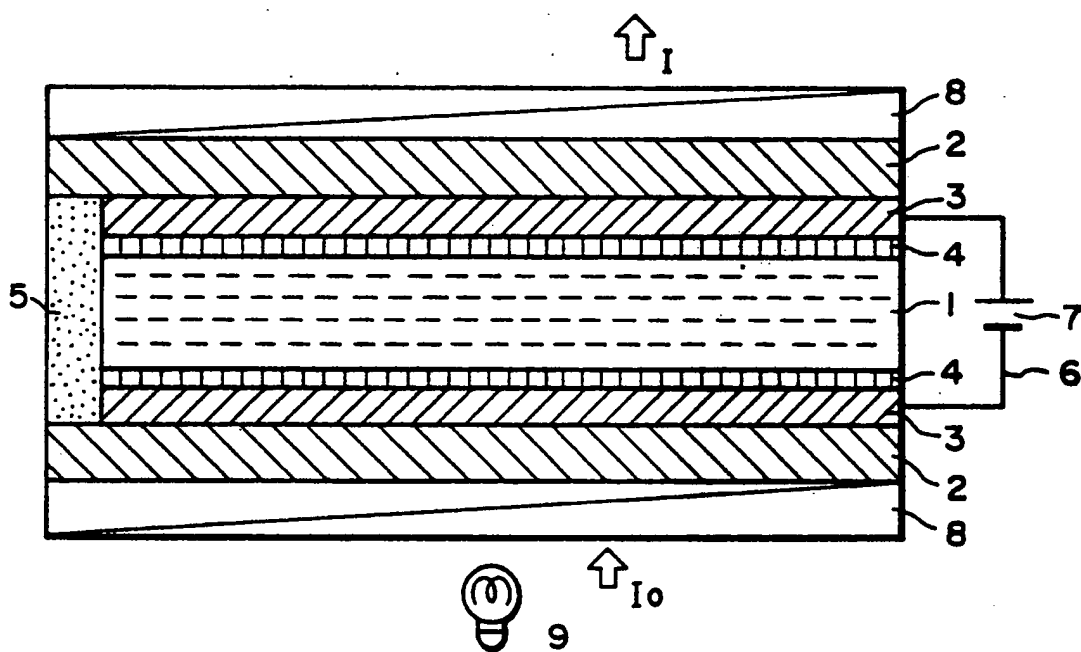


FIG. 1

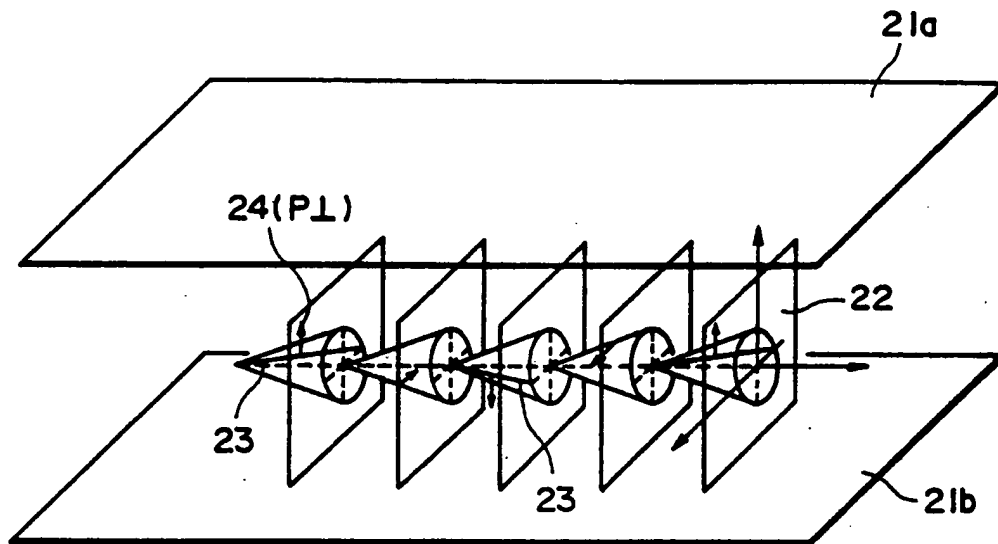


FIG. 2

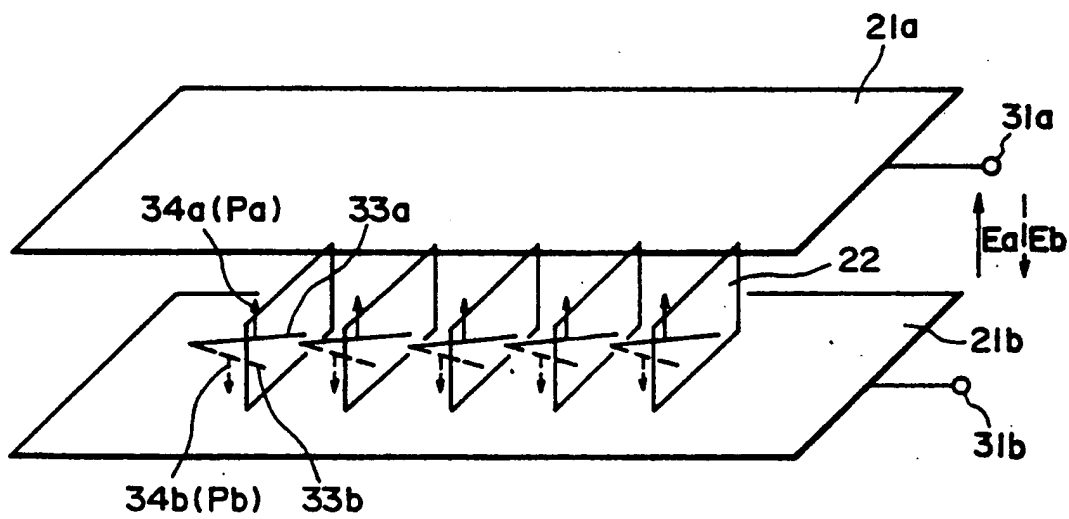


FIG. 3

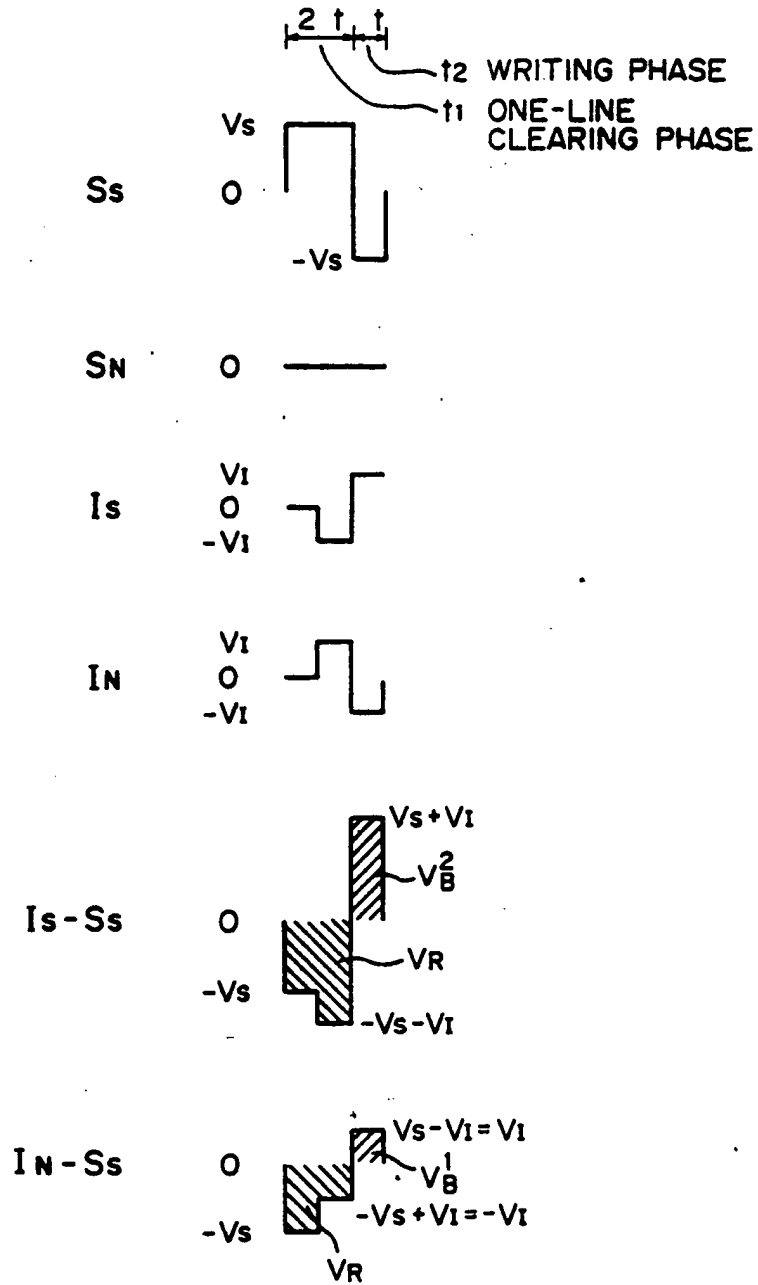


FIG. 4A

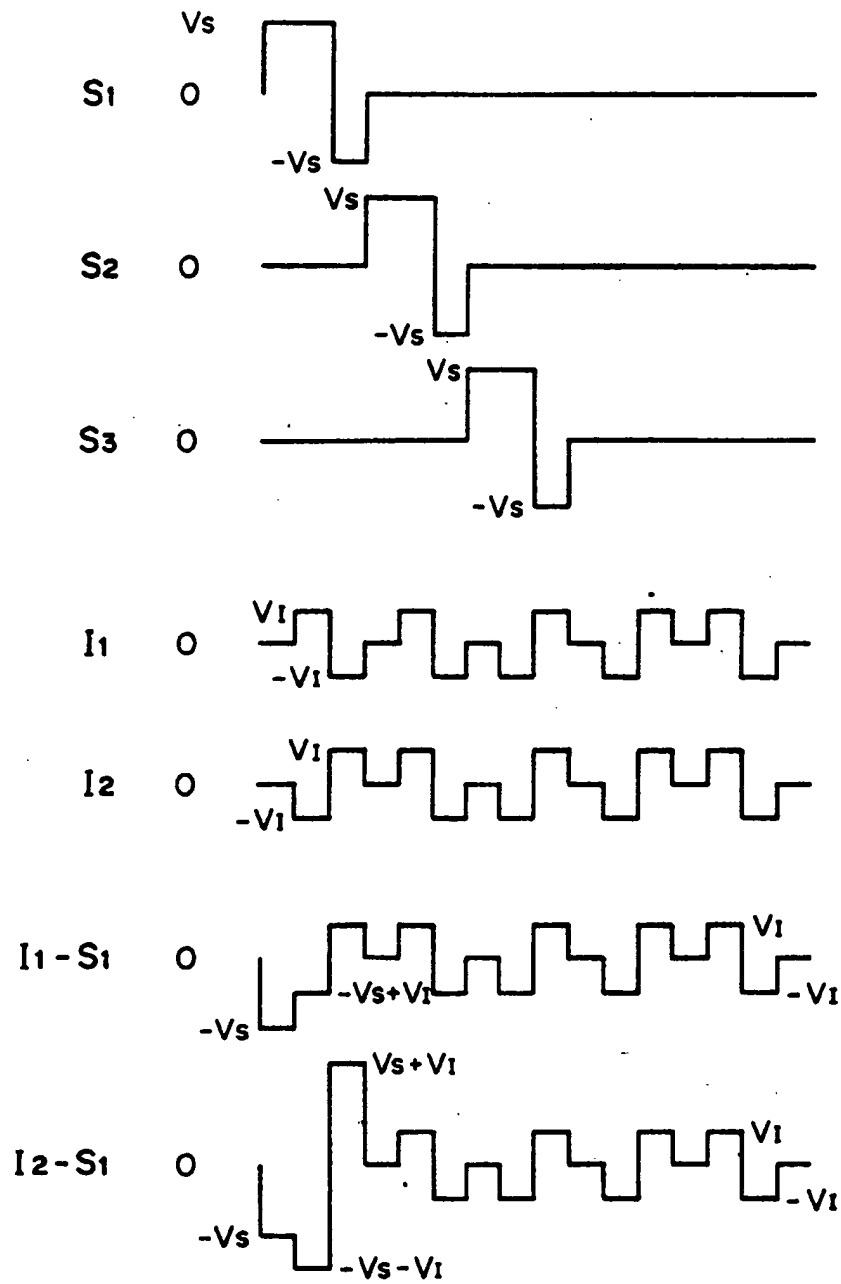


FIG. 4B

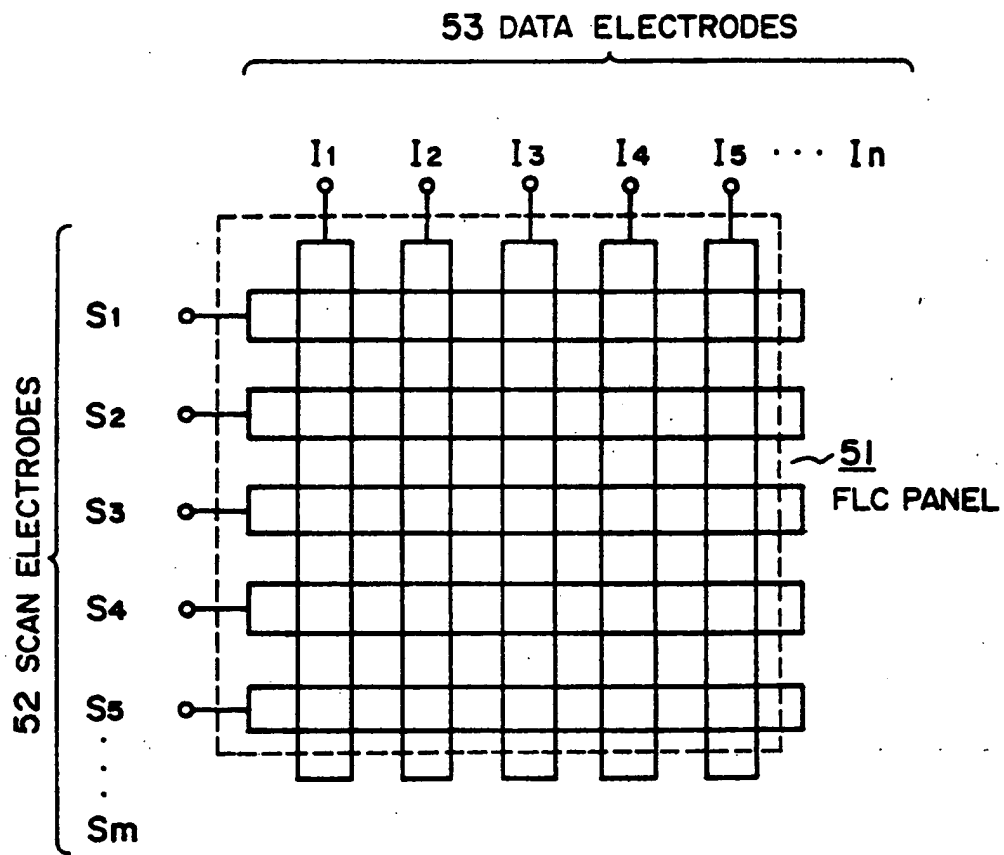


FIG. 5

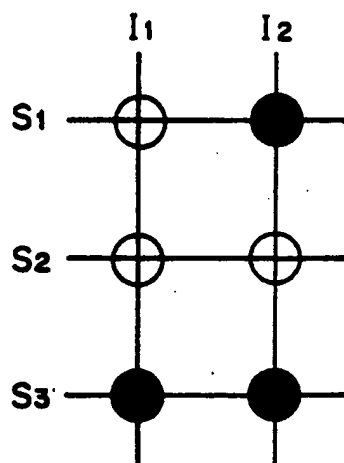


FIG. 6

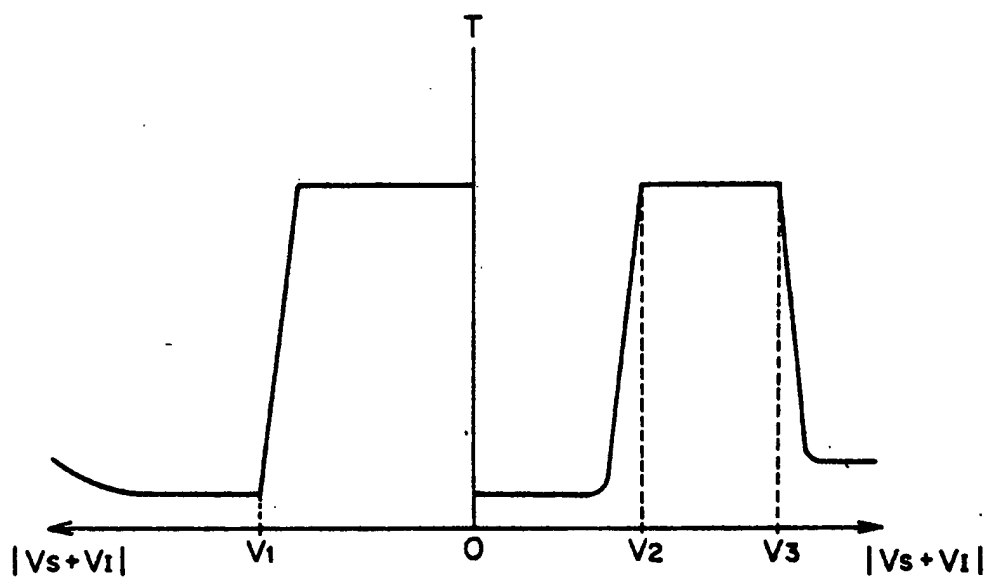


FIG. 7

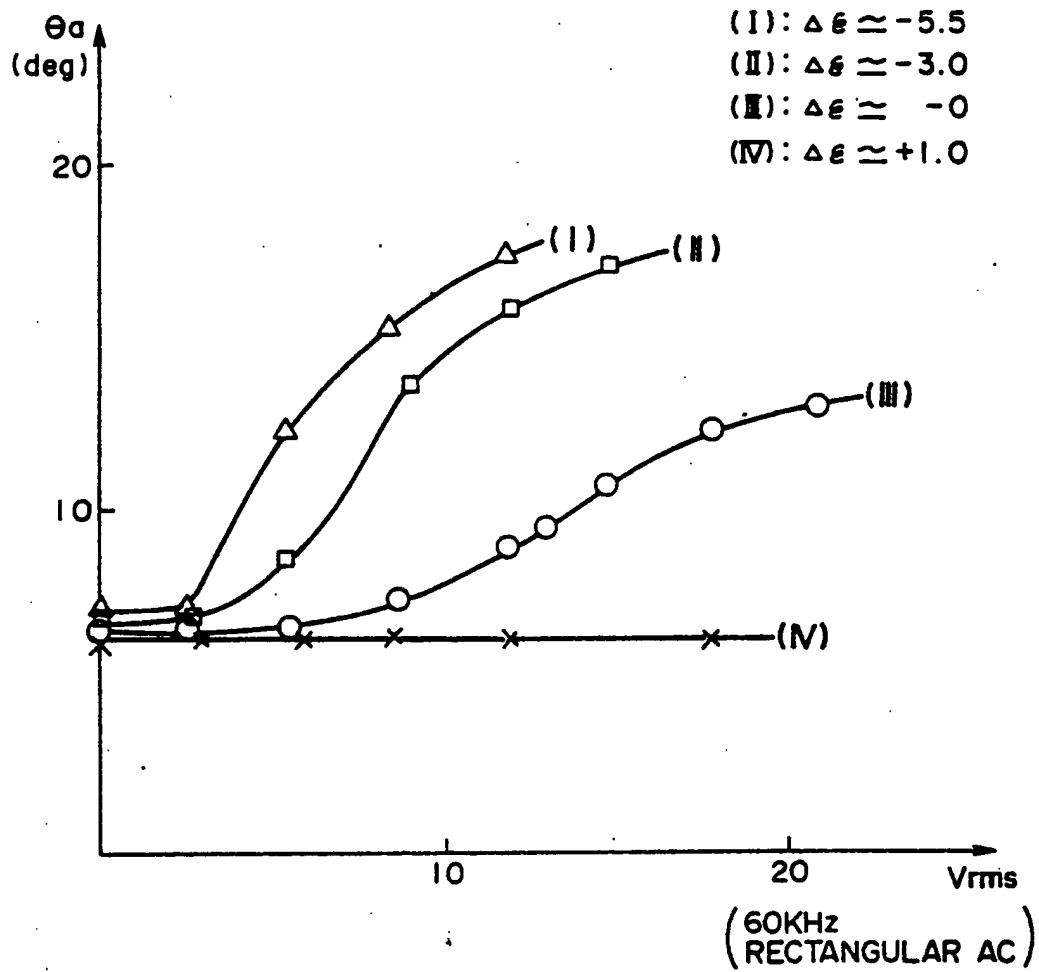


FIG. 8